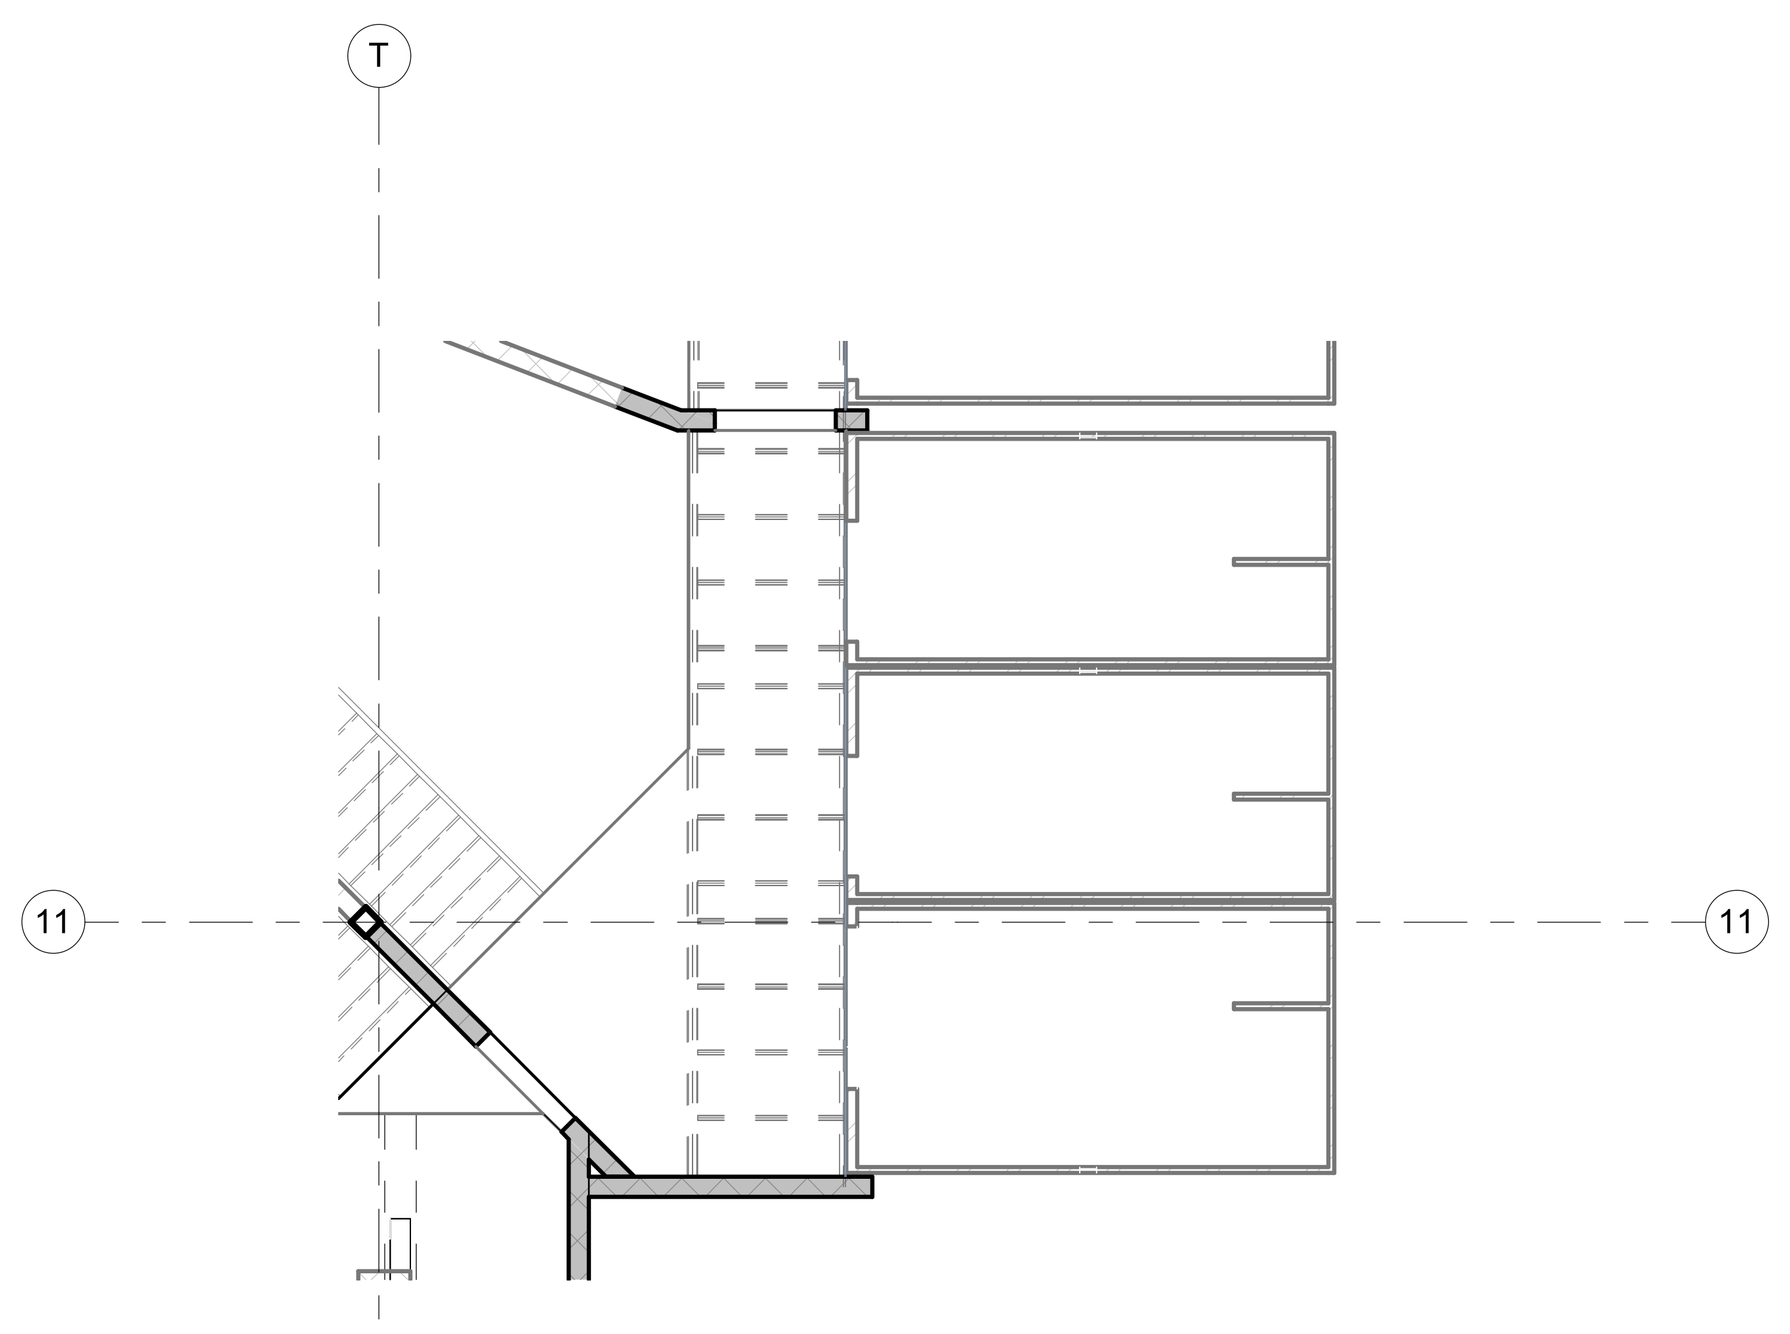

NOTE:
IN ALTERNATE LAYOUT, REMOVE CONCRETE MEZZANINE AND COLUMN BELOW. MEZZANINE AND CELLS TO BE REPLACED WITH MODULAR STEEL CELLS BY DELEGATED DESIGN.

8 DAYROOM F ALTERNATE MEZZANINE FRAMING PLAN
SCALE: 1/8" = 1'-0"
NORTH

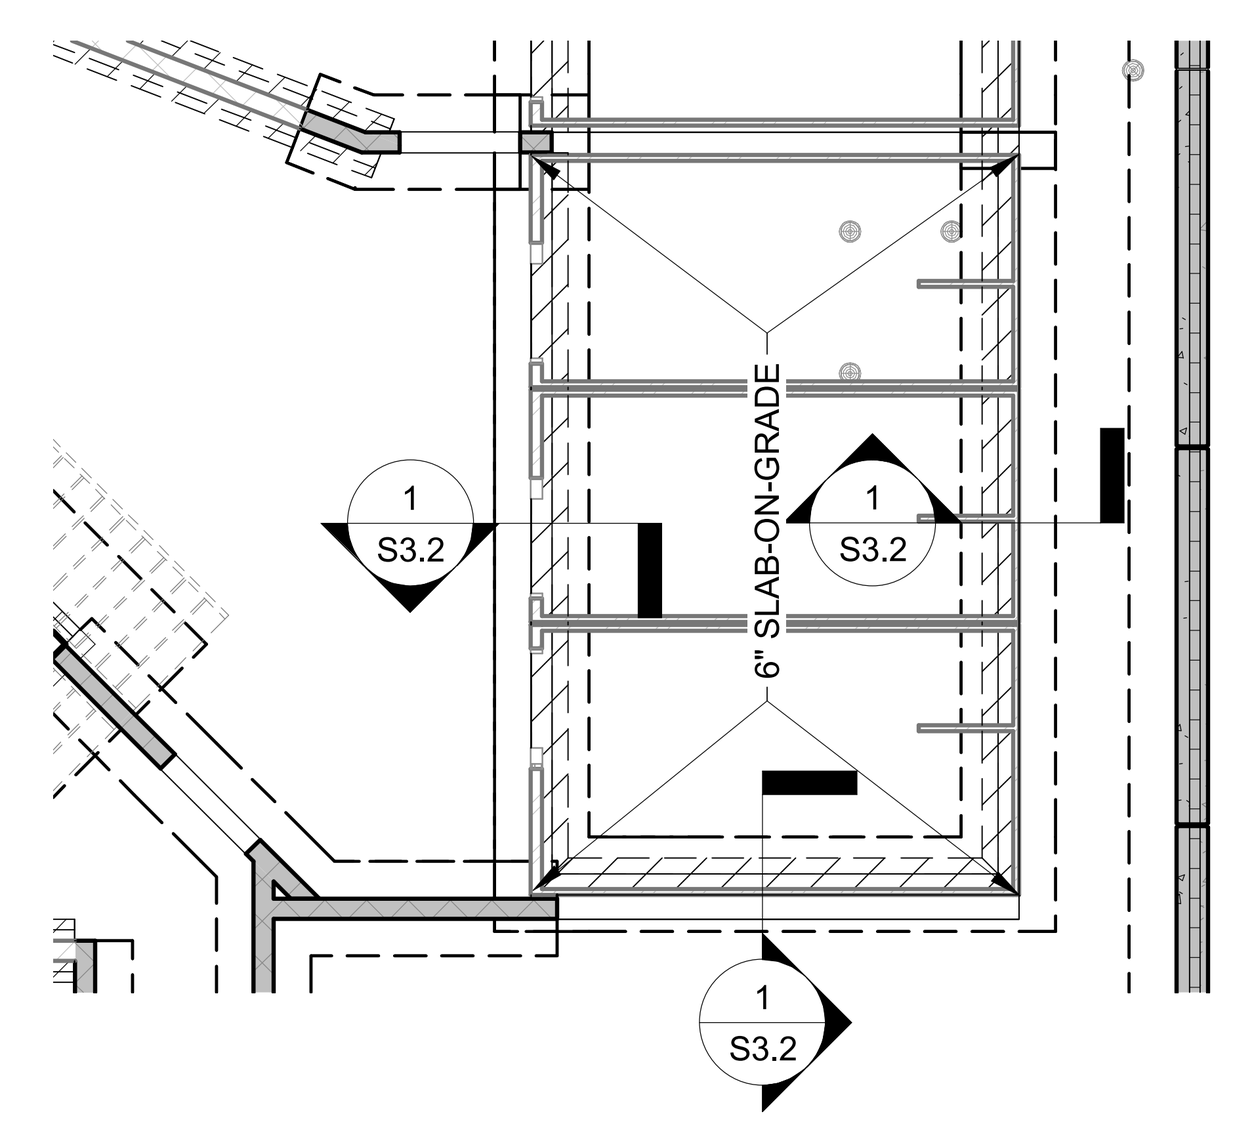

6 DAYROOM F ALTERNATE FOUNDATION PLAN
SCALE: 1/8" = 1'-0"
NORTH

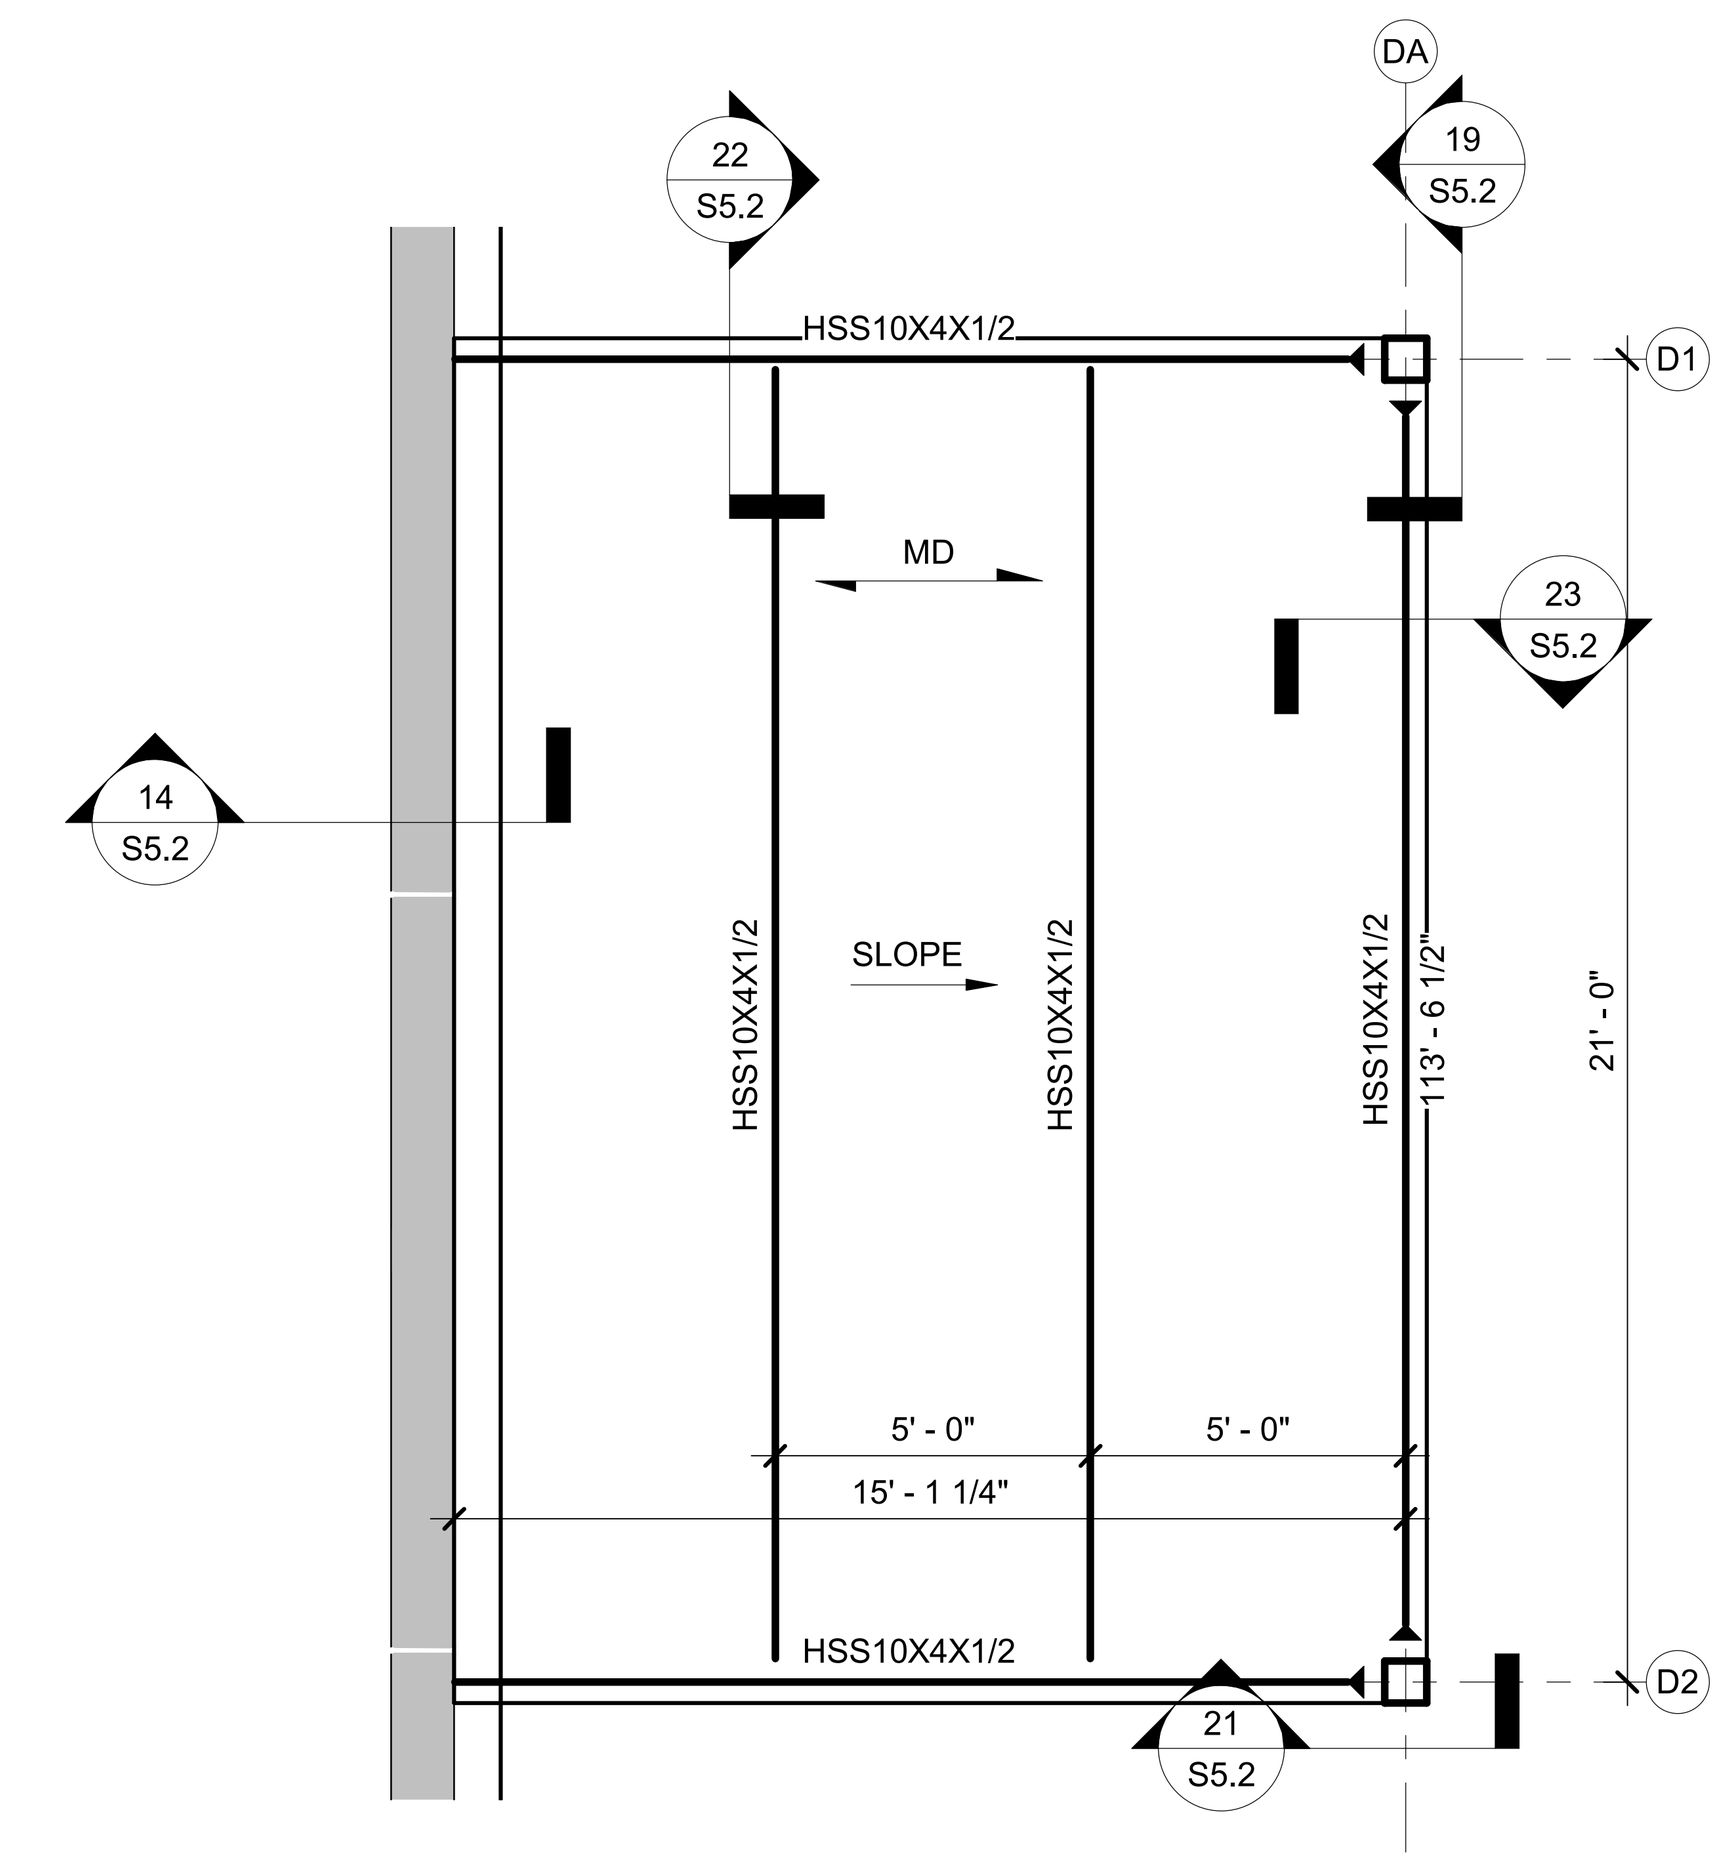

3 LOADING DOCK ENLARGED FRAMING PLAN
SCALE: 1/4" = 1'-0"
NORTH

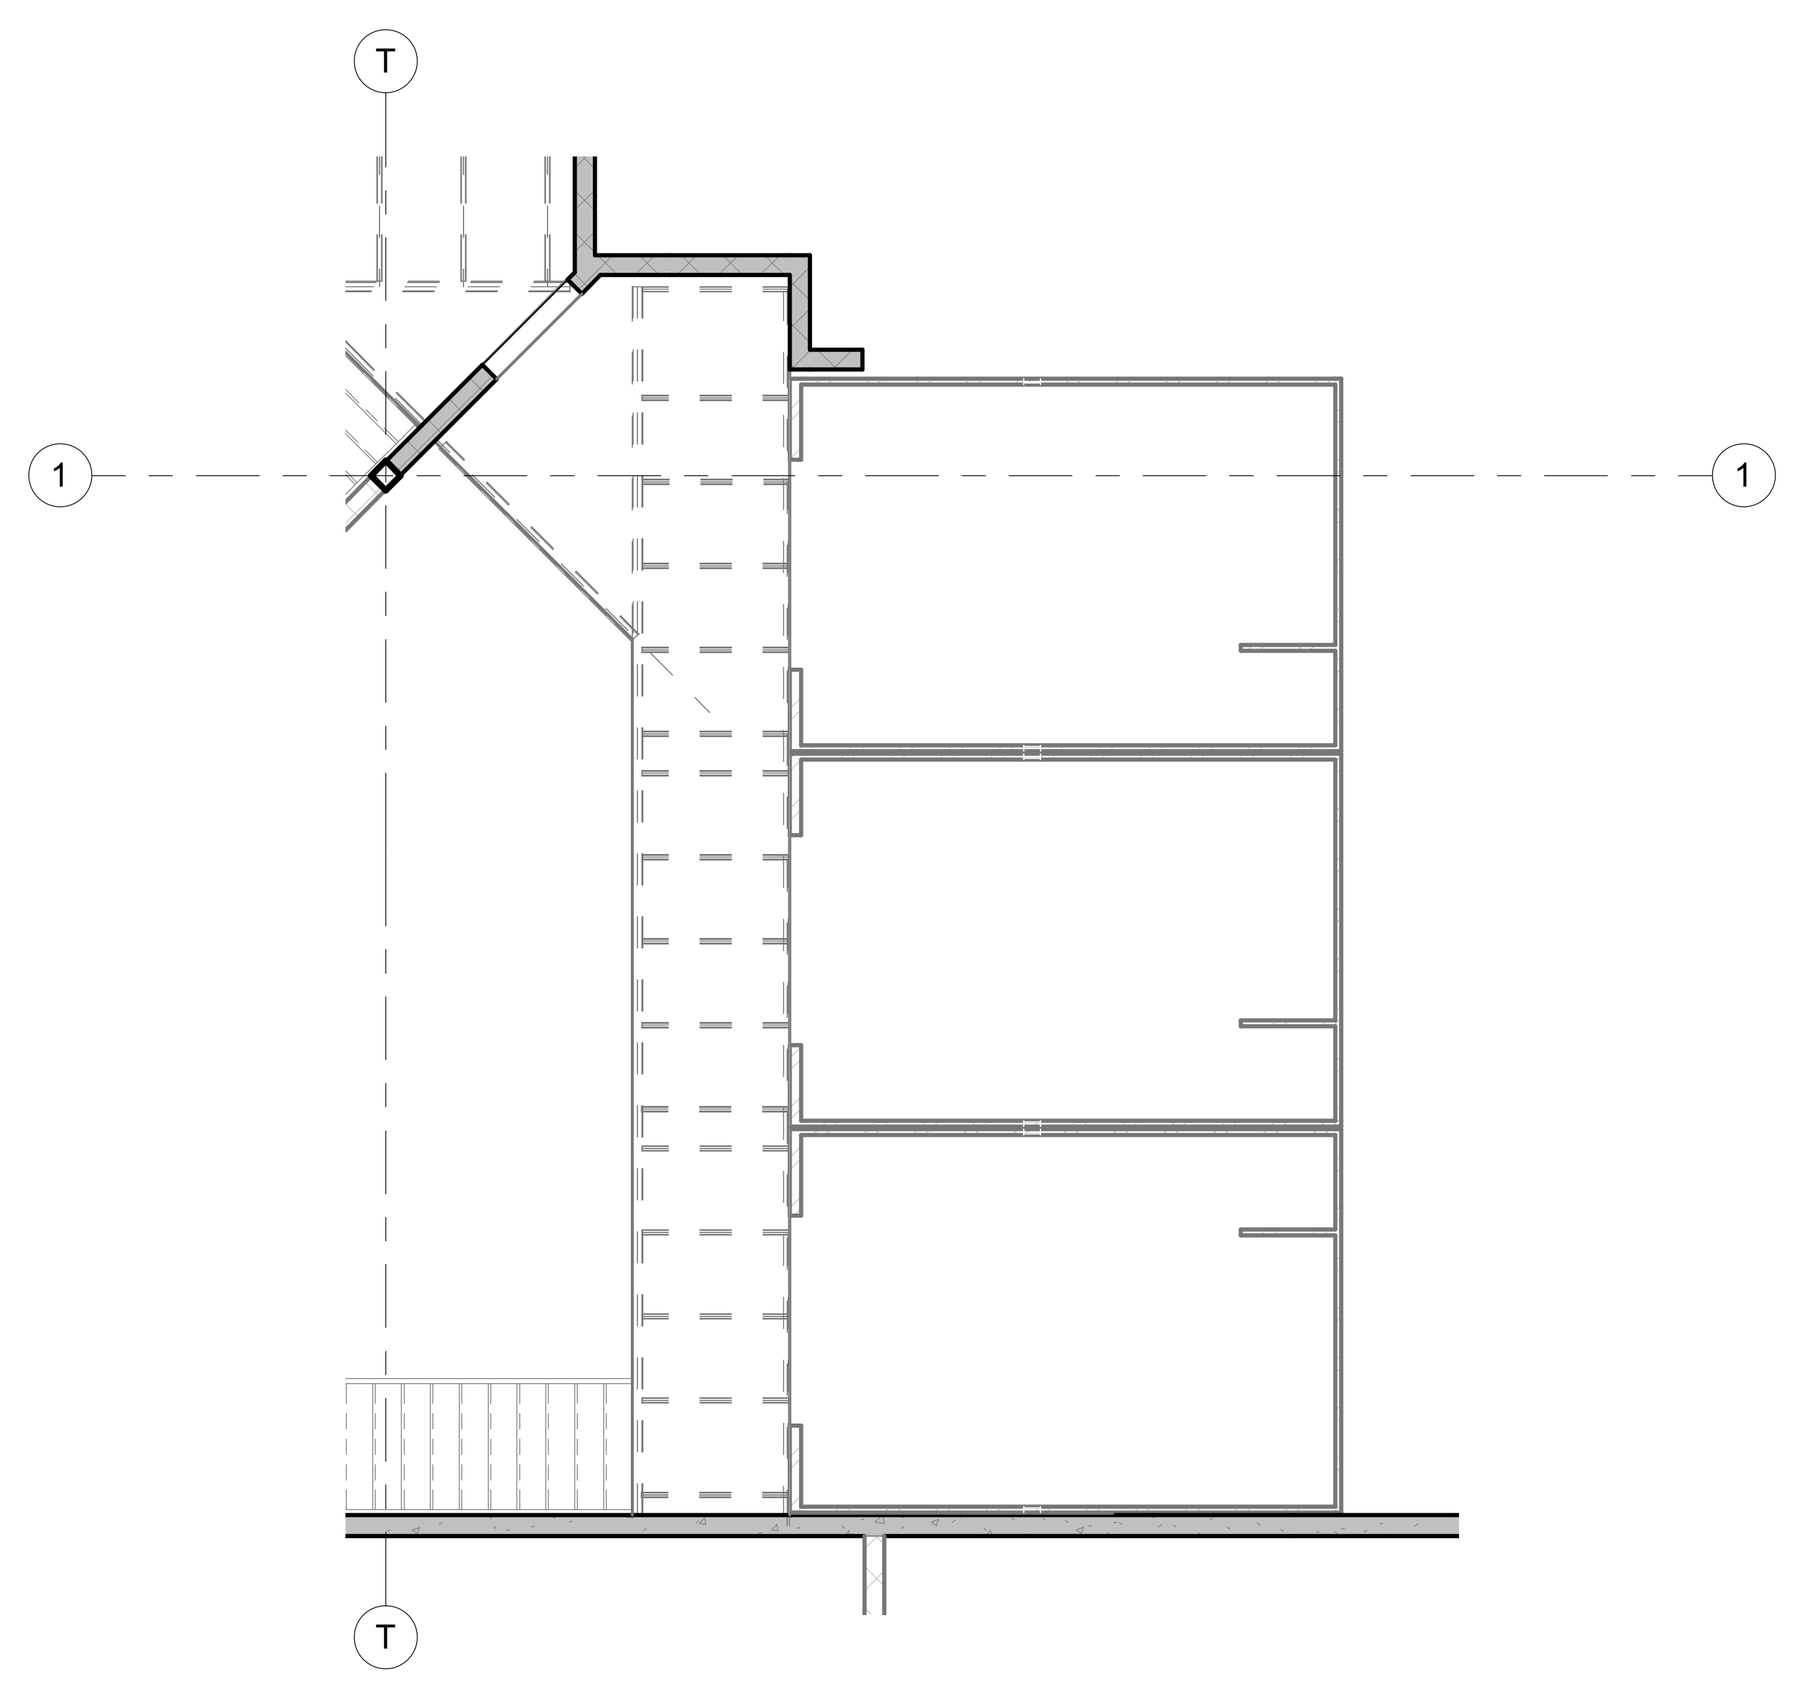

NOTE:
IN ALTERNATE LAYOUT, REMOVE CONCRETE MEZZANINE AND BEAMS. MEZZANINE AND CELLS TO BE REPLACED WITH MODULAR STEEL CELLS BY DELEGATED DESIGN.

7 DAYROOM D ALTERNATE MEZZANINE FRAMING PLAN
SCALE: 1/8" = 1'-0"
NORTH

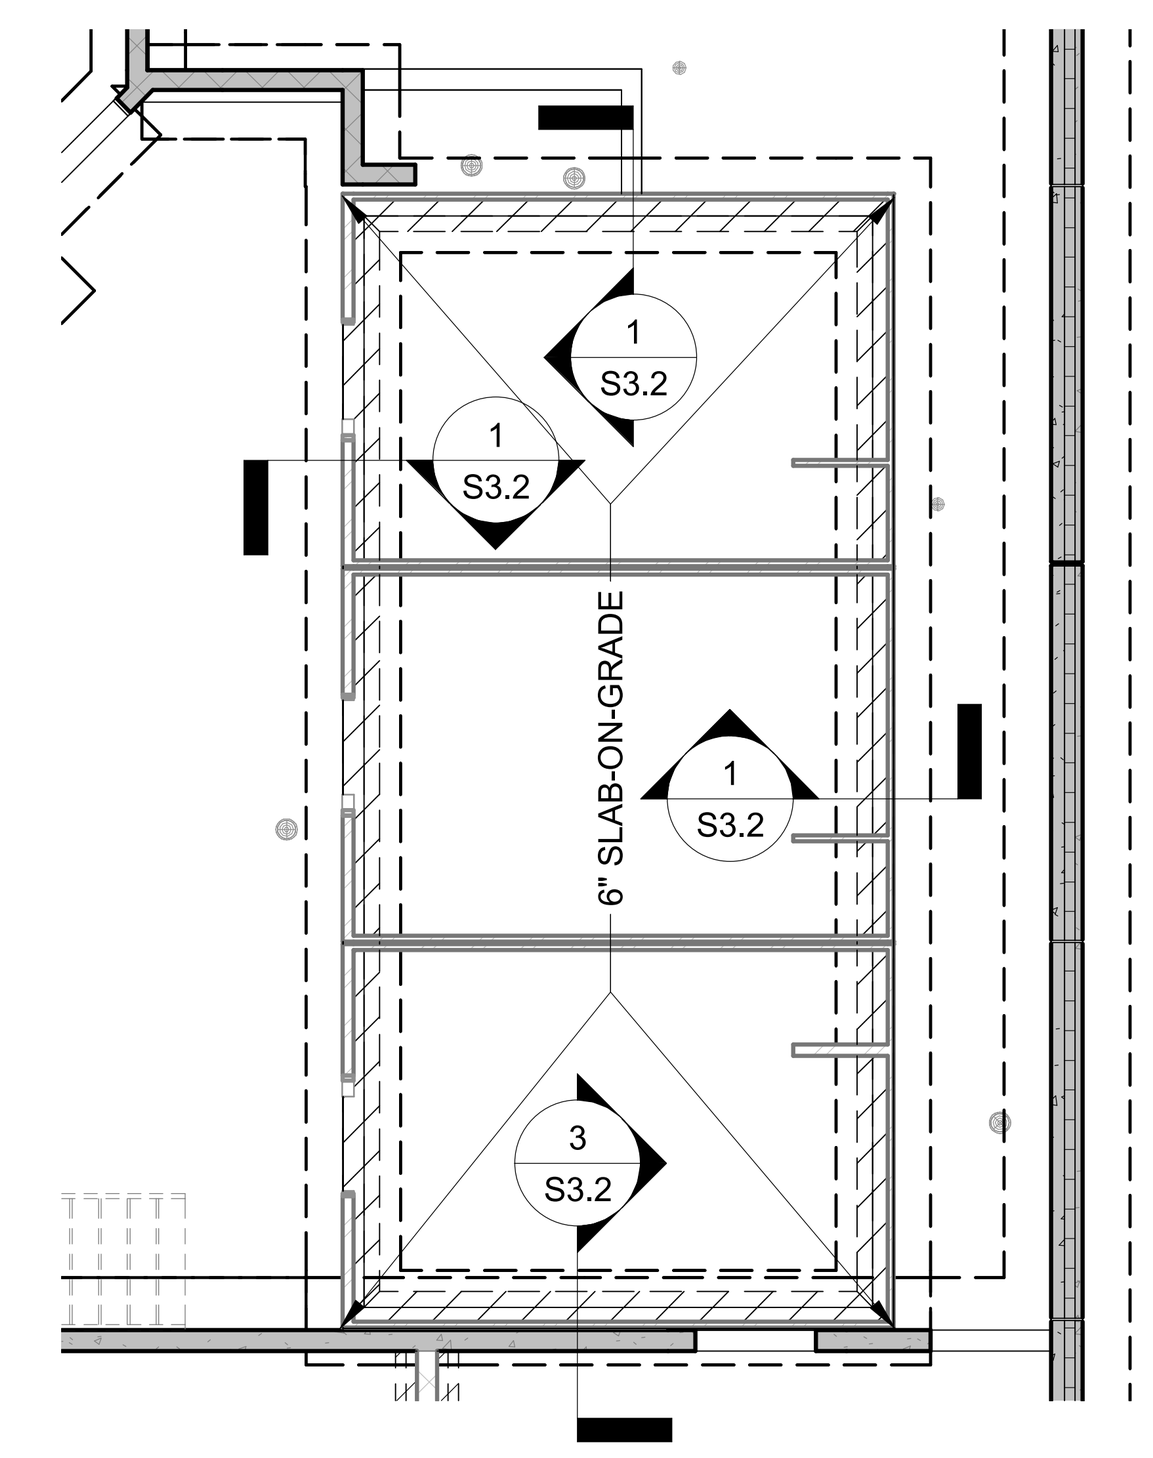

5 DAYROOM D ALTERNATE FOUNDATION PLAN
SCALE: 1/8" = 1'-0"
NORTH

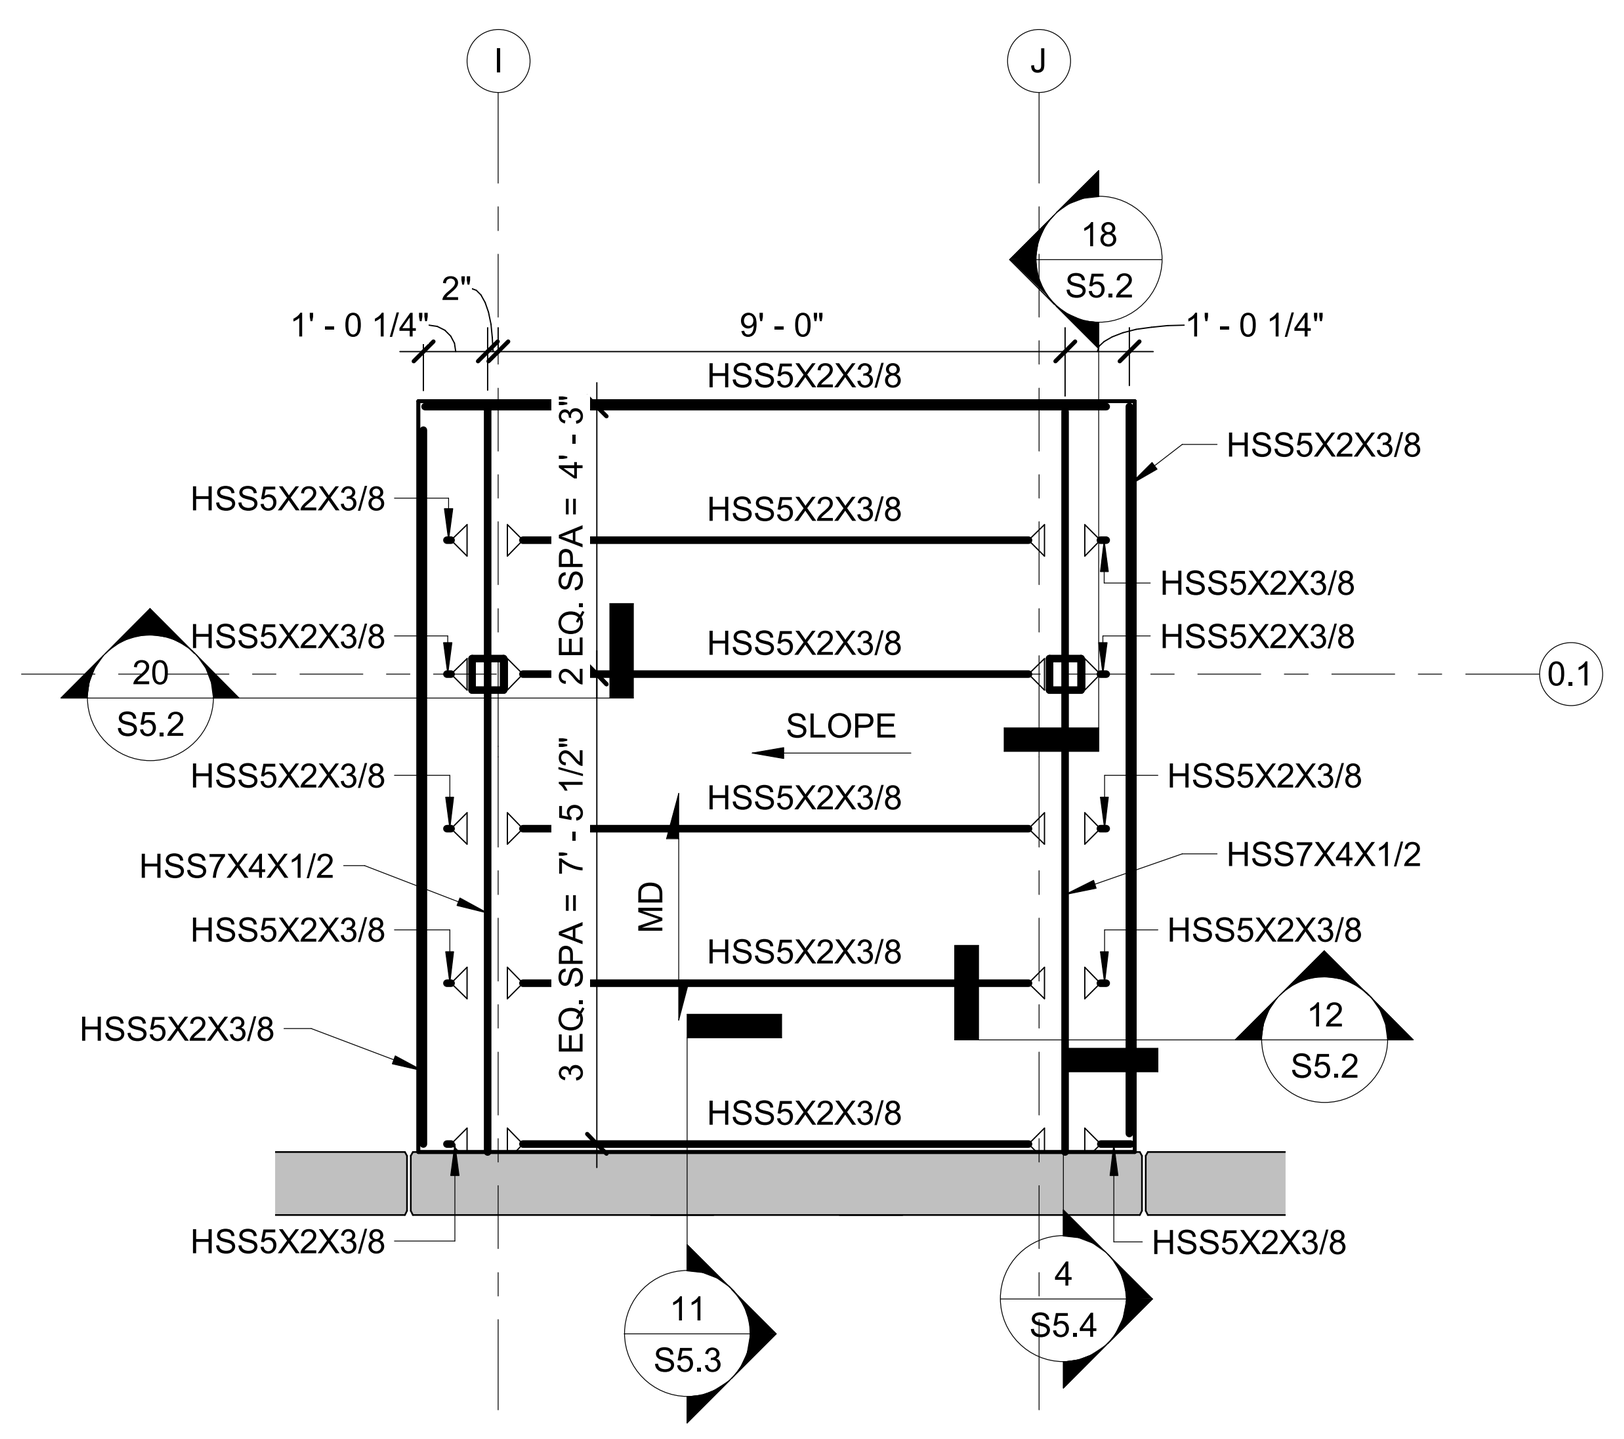

2 EMPLOYEE ENTRANCE VESTIBULE ROOF ENLARGED FRAMING PLAN
SCALE: 1/4" = 1'-0"
NORTH

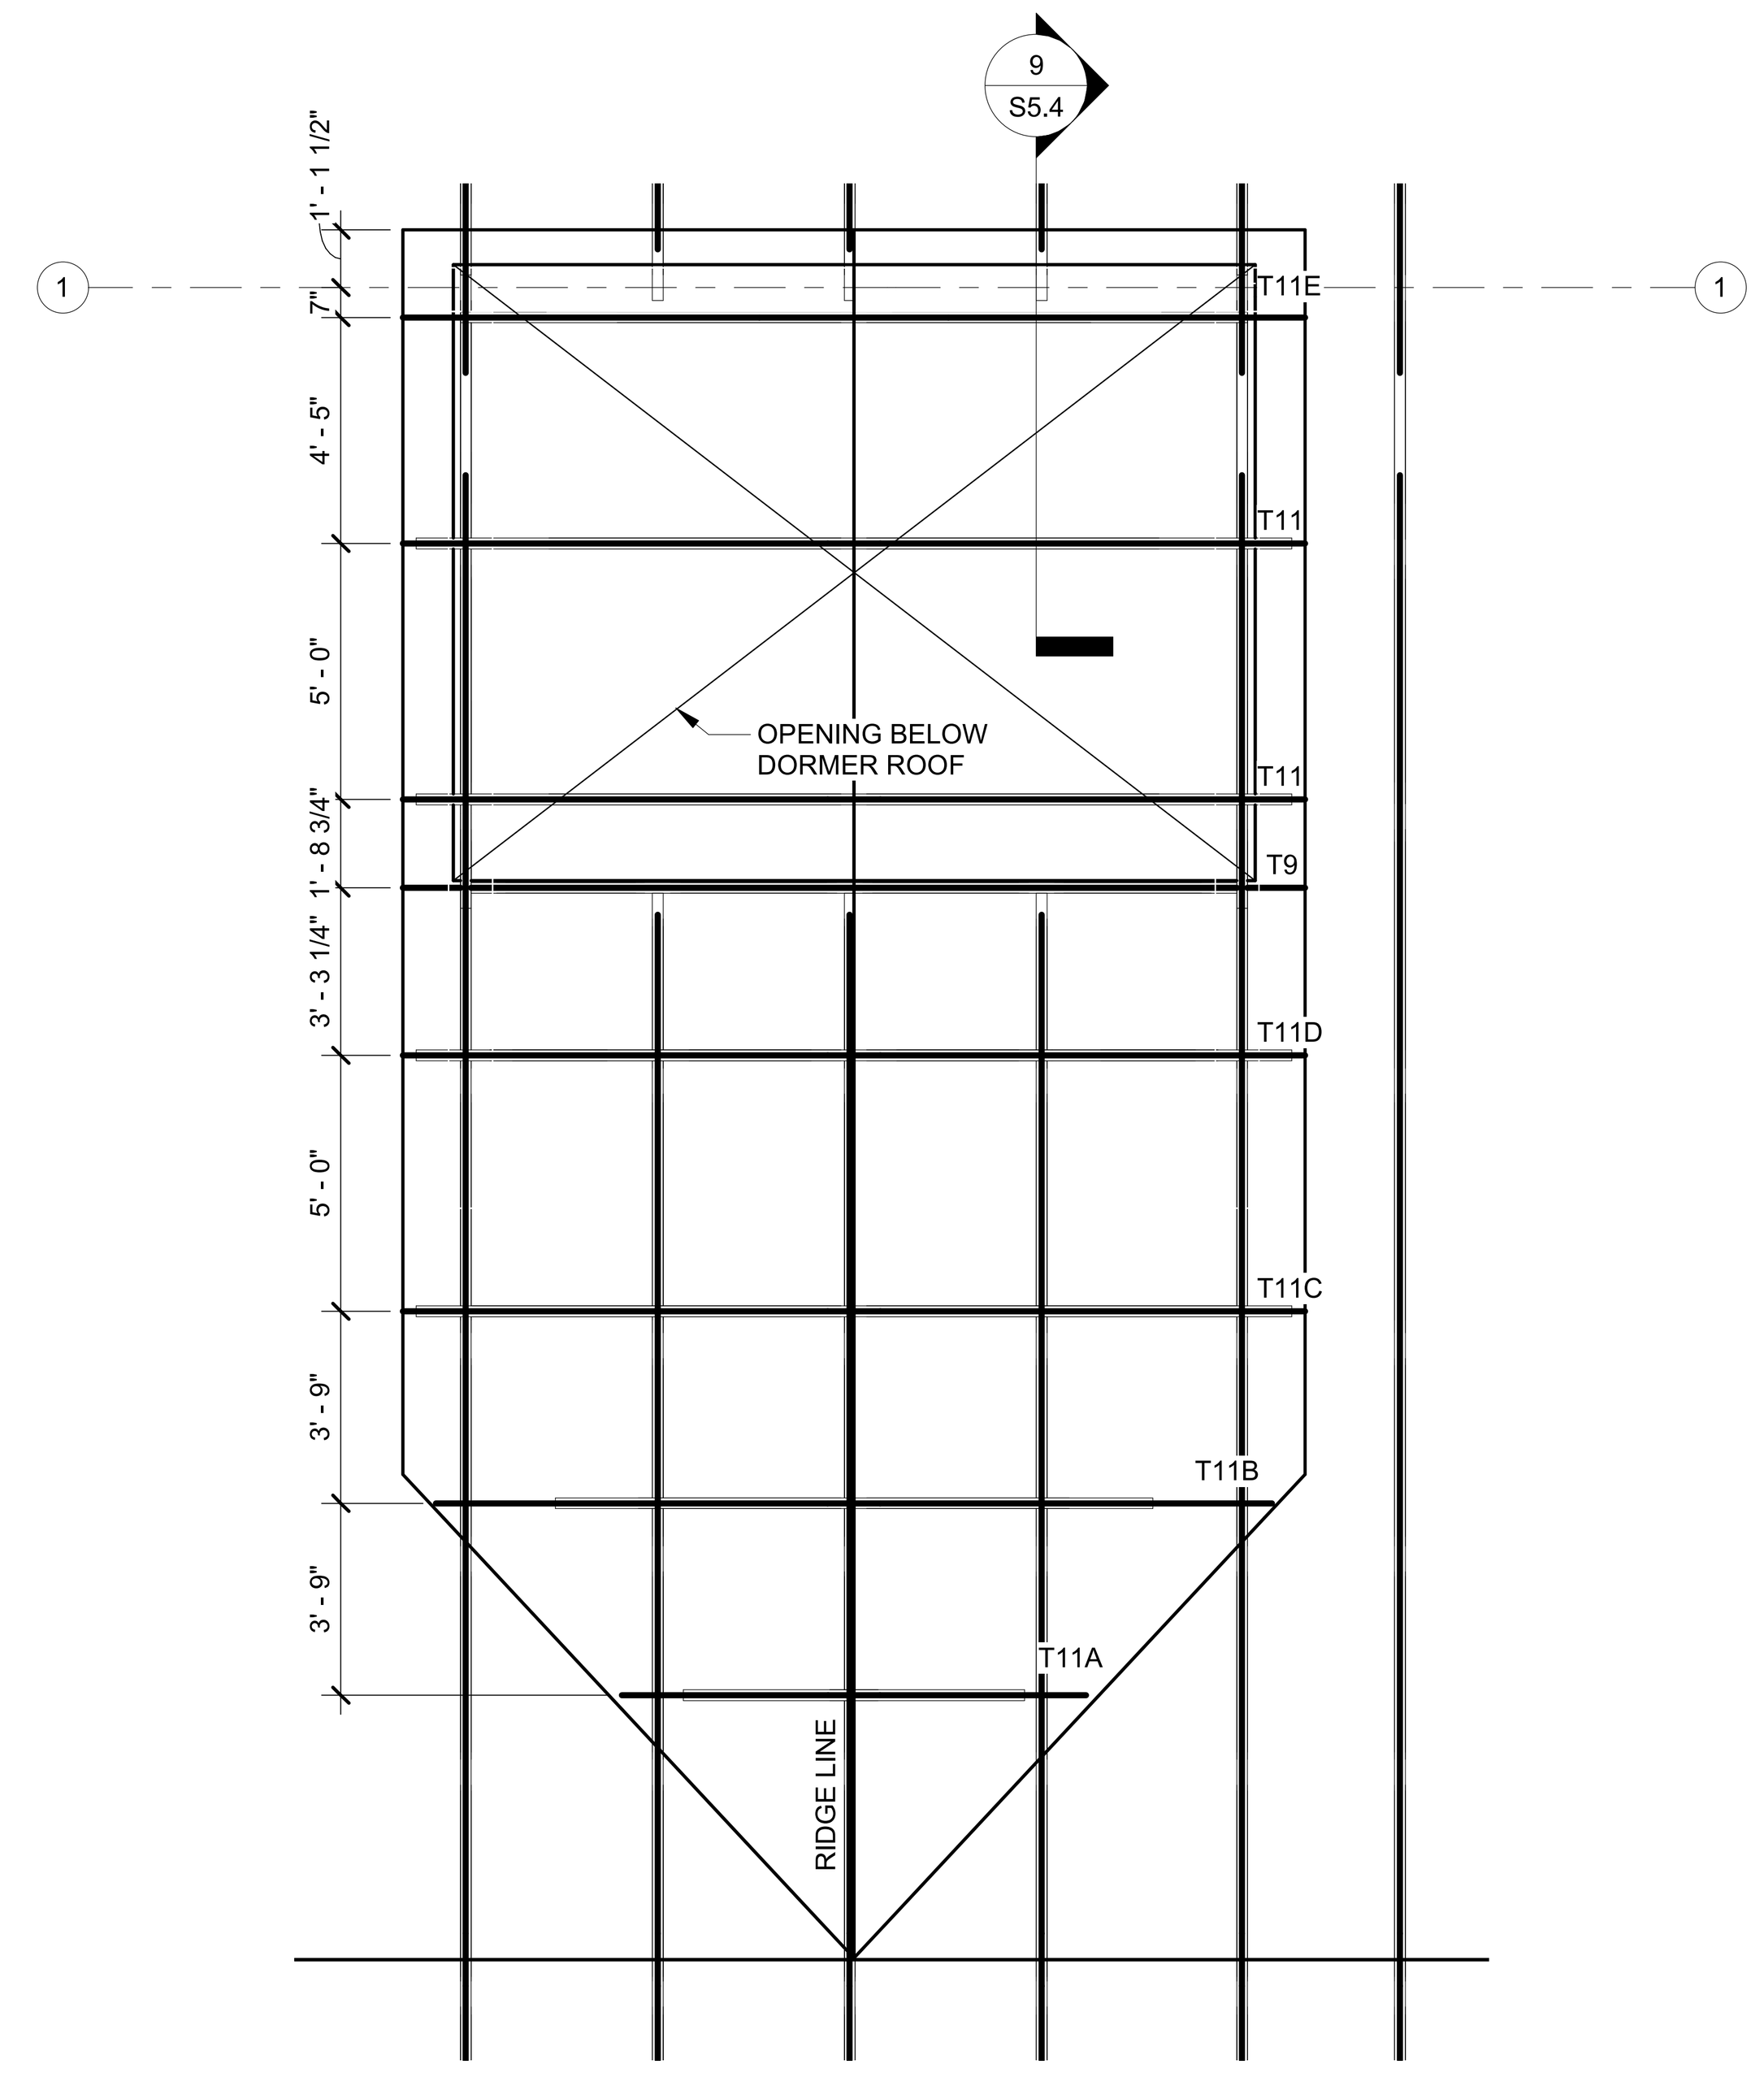

4 PROGRAM ROOM DORMER ENLARGED FRAMING PLAN
SCALE: 1/4" = 1'-0"
NORTH

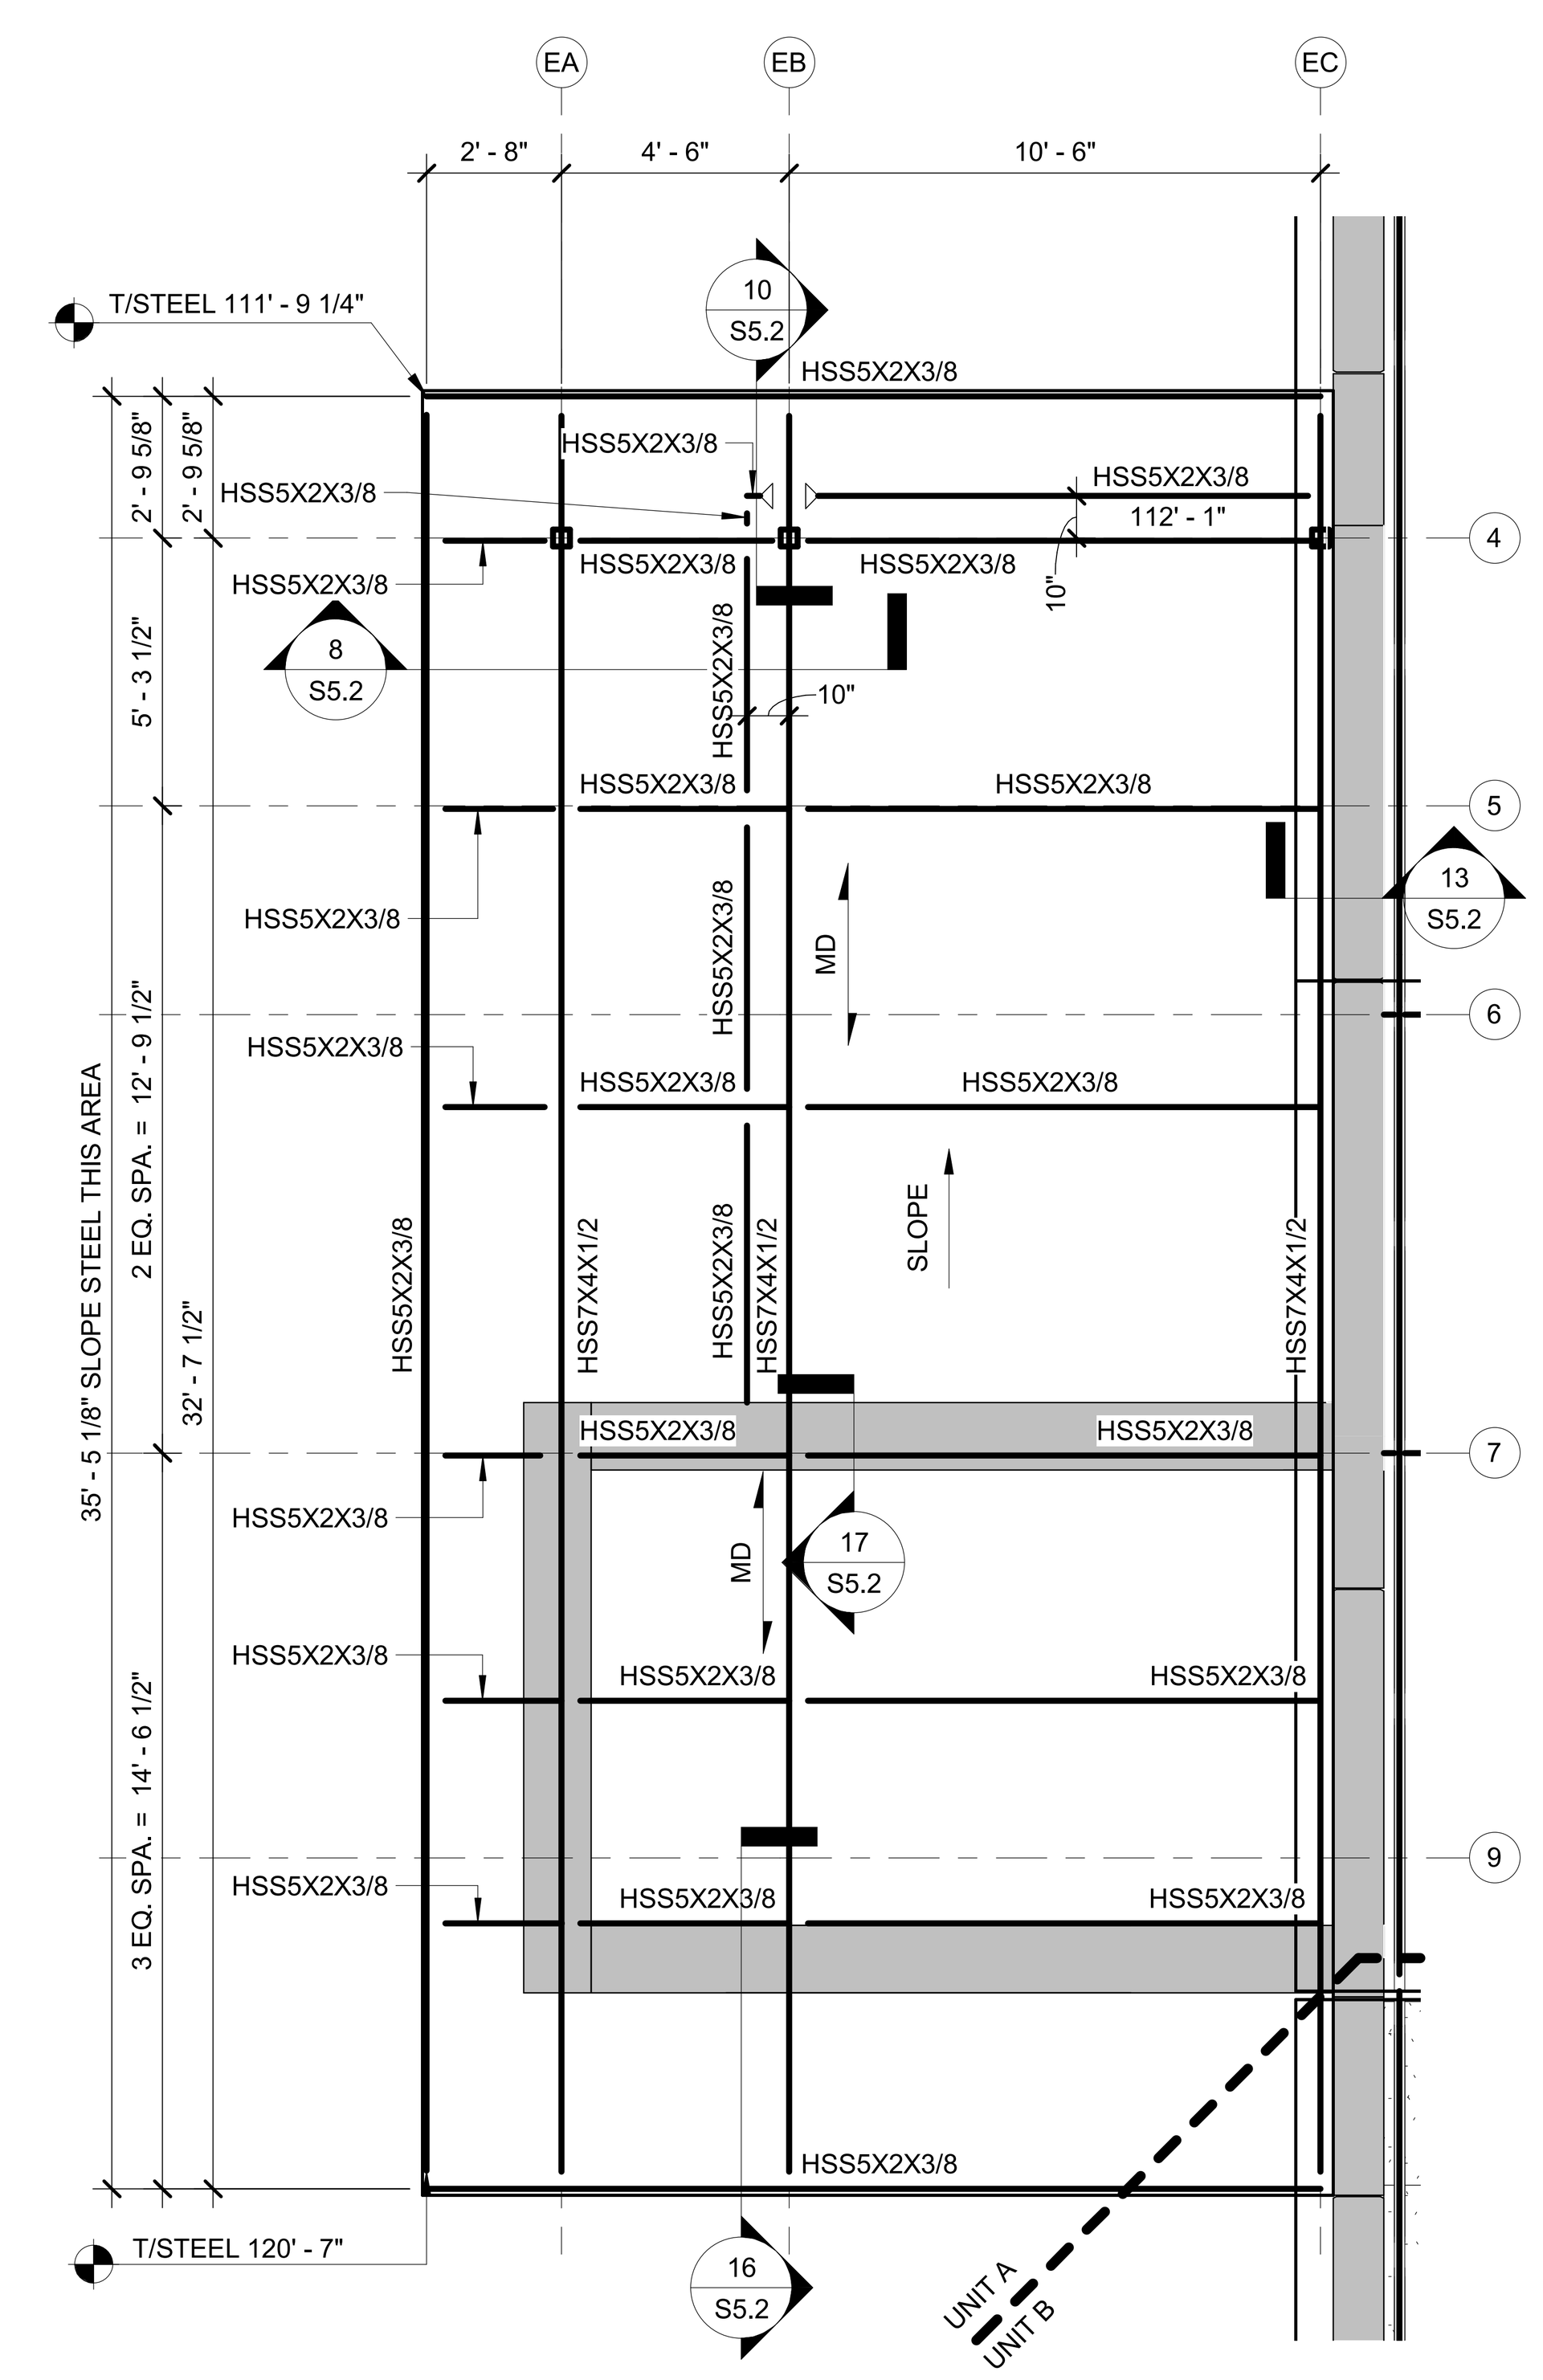

1 MAIN ENTRANCE VESTIBULE ROOF ENLARGED FRAMING PLAN
SCALE: 1/4" = 1'-0"
NORTH

PLAN NOTES:

A. REFER TO G1.1 FOR ADDITIONAL GENERAL NOTES AND INFORMATION AND S0.1 FOR ADDITIONAL STRUCTURAL GENERAL NOTES.

LEGEND:

100'-0"	TOP OF FLAT SLAB ELEVATION
SLOPE	SLAB SLOPE DIRECTION
100'-0"	SLAB ELEVATION ALONG A LINE OR AT A POINT
8 PC	SPAN OF 8" HOLLOWCORE PRECAST CONCRETE SLAB
MD	SPAN OF 1.5B20 WIDE RIB METAL ROOF DECK WITH #12 TEK SCREW SUPPORT FASTENERS AT 36/4 PATTERN AND 4 #10 TEK SCREW SIDELAP FASTENERS
CD1	SPAN OF 4" SUSPENDED CONCRETE SLAB COMPRISED OF 1 1/2" DEEP 20 GA. COMPOSITE STEEL DECK WITH 2 1/2" CONCRETE ABOVE RIBS (4" TOTAL THICKNESS). CONCRETE SHALL BE REINFORCED WITH #5 AT 12" ON CENTER EACH WAY SET 1 1/2" FROM TOP OF SLAB. 5/8" PUDDLE WELD SUPPORT FASTENERS AT 36/4 PATTERN AND 3 WELDED SIDELAP FASTENERS.
CD2	SPAN OF 8" SUSPENDED CONCRETE SLAB WITH #4 AT 10" ON CENTER EACH WAY, TOP AND BOTTOM.
ML1	MASONRY LINTEL, 8" TALL BOND BEAM W/ 2-#5
SL1	STEEL LINTEL W/ 3/8" BOTTOM PLATE, SEE SCHEDULE
	INDICATES OPENING, COODINATE SIZE AND LOCATION. PROVIDE FRAMING PER: 10/S5.0 IN COMPOSITE FLOOR SLAB, 11/S5.0 IN SLAB ON METAL DECK, 2/S5.1 IN STEEL ROOF DECK.
	MOMENT CONNECTION, SEE 13/S5.0
	CANTILEVER MOMENT CONNECTION, SEE 13/S5.0
	LOAD BEARING/SHEAR CMU WALL, REINFORCE WITH #4 AT 8" O.C.
	LOAD BEARING/SHEAR CMU WALL BELOW, REINFORCE WITH #4 AT 8" O.C.
OR / OR	PRECAST WALL

A1

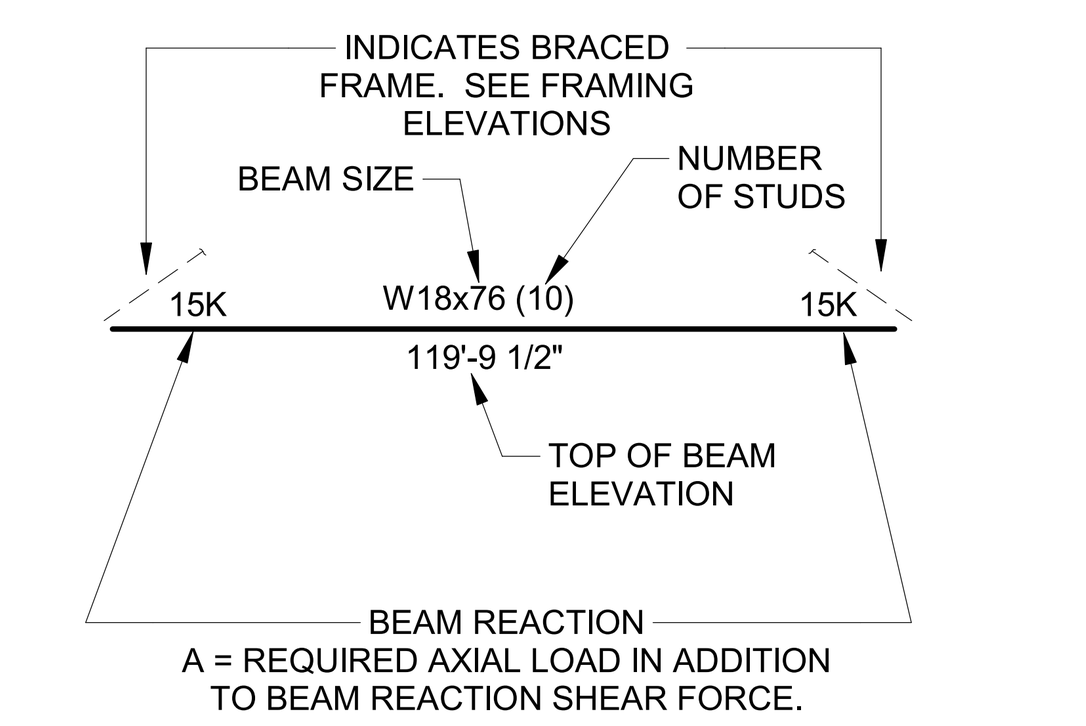

DLZ
ARCHITECTURE • ENGINEERING • PLANNING
SURVEYING • CONSTRUCTION SERVICES
DLZ INDIANA, LLC

2022/01/20
ELLIOTT G. ALLEN
REGISTERED No. 10403265
STATE OF INDIANA
PROFESSIONAL ENGINEER

NO.	REVISION	DATE
A1	ADDENDUM 1	01/20/22

DRAWN: KJJ CHK'D: EGA
DESIGNED: KJJ
APPRV'D: EGA
DATE: DECEMBER 20, 2021
PROJECT NUMBER
2063-1048-90

SULLIVAN COUNTY SHERIFF'S OFFICE AND CORRECTIONAL FACILITY
2357 NORTH SECTION STREET SULLIVAN, INDIANA 47882

ENLARGED FRAMING PLANS - 2

DRAWING NUMBER
S2.1
STRUCTURAL

C:\RevitBackups\2020\2063-1048-90 Sullivan County Jail - Struct_kjackowskiH3YGV.rvt
1/19/2022 1:42:48 PM