**ADDENDUM NO. 03**

PROJECT: SULLIVAN COUNTY SHERIFF'S OFFICE AND CORRECTIONAL FACILITY
2357 NORTH SECTION STREET
SULLIVAN, INDIANA 47882

DLZ Project Number 2063-1048-90

TO: All Bidders and others to whom Plans and Specifications for the above referenced Project have been issued.

OWNER: Sullivan County Board of Commissioners
100 Court House Square, Suite 100
Sullivan IN 47882

ARCHITECT: DLZ INDIANA, LLC
138 N. Delaware Street.
Indianapolis, Indiana 46204

CONSTRUCTION MANAGER: GARMONG CONSTRUCTION SERVICES
3050 Poplar Street
Terre Haute, Indiana 47803

DATE: February 16, 2022

CERTIFIED BY:

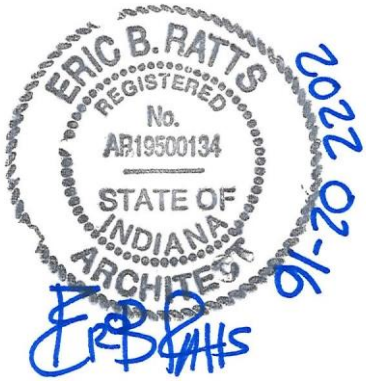


Eric B. Ratts, AIA
Registered Architect
State of Indiana

The items included in this Addendum are to become a part of the original Drawings and Project Manual dated December 20, 2021 as if included herein. Only these items are to be altered. The remainder of the original Drawings and Project Manual remain valid in their entirety. Bidders must acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject the Bidder to disqualification.

**QUESTIONS AND ANSWERS**

ITEM NO. 1.

a. QUESTION – BP #2 Earthwork: Are the additional roadway sand walk paths that may be needed going to be part of the $50,000.00 allowances as we don't have sizes or locations?

b. ANSWER – No, this work is not included in the allowance and should be carried in the base bid for BP #2. Reference the site access drawing shown in spec section 015500 – ACCESS ROADS AND PARKING AREAS.

ITEM NO. 2.

a. QUESTION – BP #2 Earthwork – Does the base bid include topsoil at the Fire Service Loop Drive with NO lime stabilization?

b. ANSWER – Yes, Correct.

**GENERAL**

ITEM NO. 3. COMMUNICATION TOWER AND SHELTER

a. Communication Tower, Shelter, and associated work will be included as part of Alternate 12.

ITEM NO. 4. SMOKE TIGHT PARTITION WALLS

a. In the housing pod all Smoke Tight Partition walls are to be one course above the Ceiling.
b. Smoke Tight Partition walls in Trash B1050 are to the underside of the precast deck.
c. Smoke Tight Partition walls in Interlock B1049 are to be one course above the rated Fire Ceiling Assembly.
d. Smoke Tight Partition walls in Inmate Workers A1060 are to the second floor deck above.

ITEM NO. 5. CLARIFICATION

a. In specification section 00 49 00 Responsible Bidder Ordinance, under "Bid Submission Requirements" the designated form by the Commissioners is Form 96 Contractor's Bid for Public Work. This form, along with all other specified information shall be included with all submitted bids.
b. Bids are to be submitted in person at the Sullivan County Courthouse to the County Auditor.
c. Contractors are not required to purchase Sullivan County Road Bonds. The Construction Manager will purchase the Road Bond from the section of Sullivan County Road 300N from Rt. 41 to Section Street.

**PROJECT MANUAL**

ITEM NO. 6. SECTION 004200 – SUPPLEMENTARY BID FORM

a. Supplementary Bid Form revised, added Alternate #12.

ITEM NO. 7. SECTION 011200 – MULTIPLE CONTRACT SUMMARY

a. BP #1 Spec section listing 05 75 00 revised
b. BP #1 Spec section 03 41 30 added
c. BP #1 Item B.7 revised
d. BP #1 Item B.8 deleted
e. BP #1 Item K.1 revised
f. BP #2 Spec section listing 32 12 16 Asphalt Paving deleted
g. BP #2 Spec section listing 32 92 00 Turf and Grasses deleted
h. BP #2 Spec section listing 33 05 24 Horizontal Directional Drilling deleted
i. BP #2 Item D.16 deleted
j. BP #2 Item E.1 revised
k. BP #4 Item #22 revised
l. BP #4 Spec section 05 75 00 Decorative Formed Metals removed
m. BP #5 Added Construction Allowance
n. BP #7 Item #47 added
o. BP #8 Added Construction Allowance
p. BP #9 Spec section listing 33 05 24 Horizontal Directional Drilling added
q. BP #10 Item 22 revised

ITEM NO. 8. SECTION 012300 – ALTERNATES
a. Part 1.3.1.L, add Alternate No. 12 in its entirety.

ITEM NO. 9. SECTION 033000 – CAST-IN-PLACE CONCRETE
a. Specification added in its entirety.

ITEM NO. 10. SECTION 034130 – PRECAST PRESTRESSED HOLLOWCORE SLAB UNITS
a. Specification added in its entirety.

ITEM NO. 11. SECTION 042200 – CONCRETE UNIT MASONRY
a. Part 2.4.B, Remove split face CMU.

ITEM NO. 12. SECTION 072119 – FOAMED-IN-PLACE INSULATION
a. Part 2, add 2.3 Barrier Coat Fireproofing in its entirety.

ITEM NO. 13. SECTION 099665 – HIGH-PERFORMANCE COATINGS
a. Remove Part 2.2 Seamless High Performance Polyurea Coating Systems, in its entirety.

ITEM NO. 14. SECTION 105626 – MOBILE STORAGE SHELVING
a. Revise Part 2.5 as shown.

ITEM NO. 15. SECTION 131200 – PREFABRICATED BUILDINGS – COMMUNICATIONS SHELTER
a. Specification added in its entirety.

ITEM NO. 16. SECTION 235123 – GAS VENTS
a. Part 2.1.A, added "10. Cheminee Lining."
b. Part 2.2.A, added "8. Cheminee Lining."
c. Part 2.3.A, added "4. Cheminee Lining."

ITEM NO. 17. SECTION 235700 – HEAT EXCHANGERS FOR HVAC
a. Part 2.1.A, added "7. Sondex by Danfoss."

ITEM NO. 18. SECTION 236423.13 – AIR-COOLED, SCROLL WATER CHILLERS
a. Part 2.13.C, revised to "95-deg F".

ITEM NO. 19. SECTION 237313.13 – INDOOR, BASIC AIR-HANDLING UNITS
a. Part 2.3.A.5, revised "Krueger" to "Pace".

ITEM NO. 20. SECTION 237433 – DEDICATED OUTDOOR-AIR UNITS
a. Part 2.1.A, add "11. Rupp Air."
b. Part 2.11.c.4.a, revised to '(Not Used)' as outside airflow not required to be monitored.

ITEM NO. 21. SECTION 238129 – VARIABLE-REFRIGERANT-FLOW HVAC SYSTEMS
a. Part 2.1.A, added "Auragreen (Energy Recovery Ventilator only)."

ITEM NO. 22. SECTION 263213.13 – DIESEL-ENGINE-DRIVEN GENERATOR SETS
a. Part 2.3.C., revised to "Power Rating: <u>Stand-by</u>; capable of continuous non-stop operation a minimum of 72 hours at full load."
b. Part 2.4.H.4, add "or lead acid,".

c. Part 2.4.H.9, revise first sentence to "Current-limiting, automatic-equalizing, and float-charging type designed for lead acid or nickel-cadmium batteries."
d. Part 2.9.A.2, revised to "Pre-fabricated or pre-engineered, galvanized-steel-clad, integral structural-steel-framed, non-walk-in enclosure; erected on concrete foundation."
e. Part 2.10.B, revised to "Provide open grated, slip resistant platforms and steps, provide handrails, anchoring, supports, and other accessories. Handrails shall be removable for service and maintenance activities. Components shall be coated steel"
f. Part 2.10.C, revised to "Platform, stairs, and handrails shall be coated steel suitable for outdoor use."

ITEM NO. 23. SECTION 264313 – SURGE PROTECTIVE DEVICES FOR LOW-VOLTAGE ELECTRICAL POWER CIRCUITS
a. Part 1.2.A.18, revised "SPD-E1PC (Emergency Lighting Panelboard 'E1PC') 208/120V, 3phase, 4-wire."
b. Part 1.2.A.19, revised "SPD-E1PD (Emergency Lighting Panelboard 'E1PD') 208/120V, 3phase, 4-wire
c. Part 1.2.B, add "Section includes ALTERNATE BID field-mounted SPDs for low-voltage (120 to 600V) power distribution and control equipment."
d. Part 1.2.B.1, add "SPD-LTH (Emergency Power Panelboard 'LTH') 480/277V, 3-phase, 4-wire.".
e. Part 1.2.B.2, add "SPD-LTP (Emergency Lighting Panelboard 'LTP') 208/120V, 3-phase, 4-wire."
f. Part 2.2.C.1.d, add "(ALT BID)."
g. Part 2.2.C.3.i, add "(ALT BID)."

ITEM NO. 24. SECTION 271500 – COMMUNICATIONS HORIZONTAL CABLING
a. Part 2.4.A, added "3. Panduit Corp."

ITEM NO. 25. SECTION 311000 – SITE CLEARING
a. Part 2.1.B, added section for Erosion Control Blanket.

ITEM NO. 26. SECTION 312000 – EARTH MOVING
a. Replace in its entirety with attached.

ITEM NO. 27. SECTION 329200 – TURF AND GRASSES
a. Part 2.2, added section for Sod.

ITEM NO. 28. SECTION 334200 – STORMWATER CONVEYANCE
a. Part 2.9, added section for Trash Racks

**DRAWINGS**

ITEM NO. 29. G1.1 – VOLUME 1 – GENERAL NOTES AND INFORMATION
a. Add sheet 7.14 – WALL SECTIONS.

ITEM NO. 30. G1.6 – CODE COMPLIANCE PLANS – RATED CAPS
- a. Revise 1/G1.6 rated ceiling assembly heights to 11'-4"
- b. Revise 2/G1.6 rated ceiling assembly heights to 23'-0'
- c. Add details 03/G1.6 and 04/G1.6 noting that rated ceiling assemblies are supported from CMU wall / steel beams.

ITEM NO. 31. G2.1 – VOLUME 2 – GENERAL NOTES AND INFORMATION
- a. Add sheet 7.14 – WALL SECTIONS.

ITEM NO. 32. C0.0 – ALTA/NSPS EXISTING SITE CONDITIONS
- a. Revised ALTA Survey

ITEM NO. 33. C2.2 – SITE LAYOUT AND GEOMETRICS PLAN - AREA B
- a. Updated building adjacent to communications tower and included alternate items.

ITEM NO. 34. C3.0 – GRADING AND EROSION CONTROL PLAN - AREA A
- a. Updated grading as shown.

ITEM NO. 35. C3.1 – GRADING AND EROSION CONTROL PLAN - AREA B
- a. Updated grading as shown.

ITEM NO. 36. C4.1 – SITE UTILITY PLAN - AREA A
- a. Revised storm sewer

ITEM NO. 37. C4.3 – SITE UTILITY PLAN – AREA C
- a. Revised storm sewer

ITEM NO. 38. A2.2 – FIRST FLOOR DIMENSION PLAN – UNIT B
- a. Add Callout for Wal Section 35/A7.14 as shown.

ITEM NO. 39. A2.9 – ADD ALTERNATE FLOOR PLANS AND DETAILS
- a. Revise Mobile Storage designations as shown.
- b. Revise Mobile Storage dimensions as shown.

ITEM NO. 40. A3.3 – DOOR AND FRAME SCHEDULE – UNIT C
- a. Revise Door A1045C to receive Elevation RCD, as shown.
- b. Remove Comment 6 on Door and Frame Schedule Comments.

ITEM NO. 41. A3.5 – DOOR AND FRAME ELEVATIONS
- a. Remove Elevation OCD2, as shown.
- b. Revise OCD1 to be OCD, as shown.
- c. Remove Comment 6 on Door and Frame Schedule Comments.

ITEM NO. 42. A4.1 – ROOF PLAN
- a. Revise size of canopy at dispatch entrance as shown.
- b. Revise canopy at loading dock as shown.

ITEM NO. 43. A5.1 – EXTERIOR ELEVATIONS
- a. Add keynote 072401 as shown.

ITEM NO. 44. A7.3 – WALL SECTIONS – UNIT A
a. Revise heights of Precast wall and add structural connections as shown.

ITEM NO. 45. A7.7 – WALL SECTIONS
a. Add detail callout to wall section 21 as shown.

ITEM NO. 46. A7.8 – WALL SECTIONS – UNIT C
a. Revise 23C/A7.8 Wall Section 23 – Enlarged Detail C as shown for clarification.

ITEM NO. 47. A7.11 – WALL SECTIONS - INTERIOR
a. Revise fire rated ceiling assembly support and height as shown.

ITEM NO. 48. A7.13 – WALL SECTIONS - INTERIOR
a. Add detail 06/A7.13 as shown.

ITEM NO. 49. A7.14 – WALL SECTIONS
a. Add sheet A7.14. Add Wall Section - Receiving.

ITEM NO. 50. A8.7 – MOBILE STORAGE SHELVING PLANS AND ELEVATIONS
a. Revise Mobile Storage designations as shown.
b. Revise Mobile Storage dimensions as shown.

ITEM NO. 51. A9.1 – OVERALL PRECAST PLAN
a. Add Typical 8'-0" Precast Bracing Wall Detail callout as shown.
b. Remove elevation 6/A9.2 and elevation 7/A9.2 complete.

ITEM NO. 52. A9.2 – EXTERIOR PRECAST PANEL ELEVATIONS
a. Remove detail 06/ A9.2 Precast Elevation Detail A complete as shown.
b. Remove detail 07/ A9.2 Precast Elevation Detail B complete as shown.

ITEM NO. 53. A9.3 – INTERIOR PRECAST PANEL ELEVATIONS
a. Add Typical 8'-0" Precast Bracing Wall Detail as shown.

ITEM NO. 54. A10.1B – FIRST FLOOR REFLECTED CEILING PLAN – UNIT B
a. Add Section Detail 6 as shown.

ITEM NO. 55. S1.0B – FOUNDATION PLAN – UNIT B
a. Revise Plan 1/S1.0B.

ITEM NO. 56. S1.1 – OVERALL MEZZANINE & LOW ROOF FRAMING PLAN
a. Revise Plan 1/S1.1.
b. Revise COLD-FORMED STEEL ROOF TRUSS NOTES.

ITEM NO. 57. S1.1B – MEZZANINE & LOW ROOF FRAMING PLAN – UNIT B
a. Revise Plan 1/S1.1B.

ITEM NO. 58. S1.1C – MEZZANINE & LOW ROOF FRAMING PLAN – UNIT C
a. Revise Plan 1/S1.1C.

ITEM NO. 59. S1.2C – HIGH ROOF FRAMING PLAN – UNIT C
- a. Revise Plan 1/S1.2C.
- b. Add Detail 6/S1.2C.
- c. Revise Plan Notes.

ITEM NO. 60. S2.0 – ENLARGED FRAMING PLANS – 1
- a. Add Plan 4/S2.0.

ITEM NO. 61. S2.1 – ENLARGED FRAMING PLANS – 2
- a. Revise Plan 3/S2.1.

ITEM NO. 62. S3.0 – TYPICAL FOUNDATION DETAILS & SECTIONS
- a. Revise Detail 4/S3.0.
- b. Revise Detail 8/S3.0.
- c. Revise Detail 9/S3.0.
- d. Revise Detail 15/S3.0.

ITEM NO. 63. S3.1 – TYPICAL FOUNDATION DETAILS & SECTIONS
- a. Revise Detail 1/S3.1.

ITEM NO. 64. S4.0 – TYPICAL MASONRY DETAILS & SECTIONS
- a. Remove Detail 16/S4.0.

ITEM NO. 65. S4.1 – TYPICAL MASONRY DETAILS & SECTIONS
- a. Add Detail 9/S4.1.

ITEM NO. 66. S5.0 – TYPICAL FRAMING DETAILS & SECTIONS
- a. Add Detail 18/S5.0.

ITEM NO. 67. S5.2 – FRAMING DETAILS & SECTIONS – 1
- a. Revise Detail 1/S5.2.
- b. Revise Detail 14/S5.2.
- c. Revise Detail 19/S5.2.
- d. Revise Detail 21/S5.2.
- e. Revise Detail 22/S5.2.
- f. Revise Detail 23/S5.2.

ITEM NO. 68. S5.3 – FRAMING DETAILS & SECTIONS – 2
- a. Revise Detail 12/S5.3.
- b. Remove Detail 19/S5.3.
- c. Add Detail 21/S5.3.
- d. Add Detail 22/S5.3.

ITEM NO. 69. S5.4 – FRAMING DETAILS & SECTIONS – 3
- a. Remove Detail 10/S5.4.

ITEM NO. 70. S6.0 – TRUSS ELEVATIONS – 1
- a. Revise View 14/S6.0.

ITEM NO. 71. S7.0 – LOADING DIAGRAMS
a. ADD Plan Note to read as follows: "B. REFER TO S1.1 FOR COLD-FORMED STEEL TRUSSES NOTES."

ITEM NO. 72. FP0.1 – GENERAL NOTES, SYMBOLS, AND ABBREVIATIONS
a. Revised note 22.

ITEM NO. 73. P0.1 - GENERAL NOTES, SYMBOLS, AND ABBREVIATIONS
a. Revised note 21.

ITEM NO. 74. P6.1 - PLUMBING FIXTURE SCHEDULE
a. Trench Drain (TD-1) basis of design updated as indicated on the plans.
b. Trench Drain (TD-4) basis of design updated as indicated on the plans.

ITEM NO. 75. P6.2 – PLUMBING EQUIPMENT SCHEDULES
a. PLUMBING EQUIPMENT SCHEDULE. Revised description and model number for the water softener.

ITEM NO. 76. M0.1 GENERAL NOTES, SYMBOLS, AND ABBREVIATIONS
a. Revised note 23.

ITEM NO. 77. M4.4 – SOLAR THERMAL – HVAC – ALTERNATE BID
a. Expansion tank basis of design updated as indicated on the plans.

ITEM NO. 78. M6.1 – MECHANICAL EQUIPMENT SCHEDULES - I
a. AIR HANDLING UNIT ENERGY WHEEL SCHEDULE: Supply and return air data for energy wheel airflow removed.

ITEM NO. 79. E0.1 – GENERAL NOTES, SYMBOLS AND ABBREVIATIONS
a. Replace sheet with attached E0.1 dated 02/16/22. Revisions are individually clouded.

ITEM NO. 80. E1.0 – ELECTRICAL SITE PLAN
a. Replace sheet with attached E1.0 dated 02/16/22. Revisions are individually clouded.

ITEM NO. 81. E4.1C – FIRST FLOOR SYSTEMS PLAN – UNIT C
a. Replace sheet with attached E4.1C dated 02/16/22. Revisions are individually clouded.

ITEM NO. 82. E6.1 - LIGHT FIXTURE SCHEDULES
a. Replace sheet with attached E6.1 dated 02/16/22. Revisions are individually clouded.

ITEM NO. 83. E6.3 – CATV RISER DIAGRAM AND TRANSFORMER SCHEDULE
a. Replace sheet with attached E6.3 dated 02/16/22. Revisions are individually clouded.

ITEM NO. 84. E6.9 - PANELBOARD SCHEDULES
a. Replace sheet with attached E6.9 dated 02/16/22. Revisions are individually clouded.

ITEM NO. 85. E7.1 – ONE-LINE DIAGRAM
a. Replace sheet with attached E7.1 dated 02/16/22. Revisions are individually clouded.

ITEM NO. 86. E7.2 – CONDUIT AND CABLE SCHEDULES
a. Replace sheet with attached E7.2 dated 02/16/22. Revisions are individually clouded.

ITEM NO. 87. E8.2 – ELECTRICAL DETAILS
a. Replace sheet with attached E8.2 dated 02/16/22. Revisions are individually clouded.

ITEM NO. 88. E8.7 – ELECTRICAL DETAILS
a. Replace sheet with attached E8.7 dated 02/16/22. Revisions are individually clouded.

**ATTACHMENTS:**

**PROJECT MANUAL**

1. SECTION 004200 – SUPPLEMENTARY BID FORM
2. SECTION 011200 – MULTIPLE CONTRACT SUMMARY
3. SECTION 012300 – ALTERNATES
4. SECTION 034130 – PRECAST PRESTRESSED HOLLOWCORE SLAB UNITS
5. SECTION 042200 – CONCRETE UNIT MASONRY
6. SECTION 072119 – FOAMED-IN-PLACE INSULATION
7. SECTION 099665 – HIGH-PERFORMANCE COATINGS
8. SECTION 105626 – MOBILE STORAGE SHELVING
9. SECTION 131200 – PREFABRICATED BUILDINGS – COMMUNICATION SHELTER
10. SECTION 235123 – GAS VENTS
11. SECTION 235700 – HEAT EXCHANGERS FOR HVAC
12. SECTION 236423.13 – AIR-COOLED, SCROLL WATER CHILLERS
13. SECTION 237313.13 – INDOOR, BASIC AIR-HANDLING UNITS
14. SECTION 237433 – DEDICATED OUTDOOR-AIR UNITS
15. SECTION 238129 – VARIABLE-REFRIGERANT-FLOW HVAC SYSTEMS
16. SECTION 263213.13 – DIESEL-ENGINE-DRIVEN GENERATOR SETS
17. SECTION 264313 – SURGE PROTECTIVE DEVICES FOR LOW-VOLTAGE ELECTRICAL POWER CIRCUITS
18. SECTION 271500 – COMMUNICATIONS HORIZONTAL CABLING
19. SECTION 311000 – SITE CLEARING
20. SECTION 312000 – EARTH MOVING
21. SECTION 329200 – TURF AND GRASSES
22. SECTION 334200 – STORMWATER CONVEYANCE

**DRAWINGS – VOLUME 1**

1. G1.1 – VOLUME 1 – GENERAL NOTES AND INFORMATION
2. G1.6 – CODE COMPLIANCE PLANS – RATED CAPS
3. G2.1 – VOLUME 2 – GENERAL NOTES AND INFORMATION
4. C0.0 – ALTA/NSPS EXISTING SITE CONDITIONS
5. C2.2 – SITE LAYOUT AND GEOMETRICS PLAN – AREA B
6. C3.0 – GRADING AND EROSION CONTROL PLAN – AREA A
7. C3.1 – GRADING AND EROSION CONTROL PLAN – AREA B

8. C4.1 – SITE UTILITY PLAN – AREA A
9. C4.3 – SITE UTILITY PLAN – AREA C
10. A2.2 – FIRST FLOOR DIMENSION PLAN – UNIT B
11. A2.9 – ADD ALTERNATE FLOOR PLANS AND DETAILS
12. A3.3 – DOOR AND FRAME SCHEDULE – UNIT C
13. A3.5 – DOOR AND FRAME ELEVATIONS
14. A4.1 – ROOF PLAN
15. A5.1 – EXTERIOR ELEVATIONS
16. A7.3 – WALL SECTIONS – UNIT A
17. A7.7 – WALL SECTIONS – UNIT C
18. A7.8 – WALL SECTIONS – UNIT C
19. A7.11 – WALL SECTIONS – INTERIOR
20. A7.13 – WALL SECTIONS – INTERIOR
21. A7.14 – WALL SECTIONS
22. A8.7 – MOBILE STORAGE SHELVING PLANS AND ELEVATIONS
23. A9.1 – OVERALL PRECAST PLAN
24. A9.2 – EXTERIOR PRECAST PANEL ELEVATIONS
25. A9.3 – INTERIOR PRECAST PANEL ELEVATIONS
26. A10.1B – FIRST FLOOR REFLECTED CEILING PLAN – UNIT B
27. S1.0B – FOUNDATION PLAN – UNIT B
28. S1.1 – OVERALL MEZZANINE & LOW ROOF FRAMING PLAN
29. S1.1B – MEZZANINE & LOW ROOF FRAMING PLAN – UNIT B
30. S1.1C – MEZZANINE & LOW ROOF FRAMING PLAN – UNIT C
31. S1.2C – HIGH ROOF FRAMING PLAN – UNIT C
32. S2.0 – ENLARGED FRAMING PLANS – 1
33. S2.1 – ENLARGED FRAMING PLANS – 2
34. S3.0 – TYPICAL FOUNDATION DETAILS & SECTIONS
35. S3.1 – TYPICAL FOUNDATION DETAILS & SECTIONS
36. S4.0 – TYPICAL MASONRY DETAILS & SECTIONS
37. S4.1 – TYPICAL MASONRY DETAILS & SECTIONS
38. S5.0 – TYPICAL FRAMING DETAILS & SECTIONS
39. S5.2 – FRAMING DETAILS & SECTIONS – 1
40. S5.3 – FRAMING DETAILS & SECTIONS – 2
41. S5.4 – FRAMING DETAILS & SECTIONS – 3
42. S6.0 – TRUSS ELEVATIONS – 1
43. S7.0 – LOADING DIAGRAMS

**DRAWINGS – VOLUME 2**

44. FP0.1 – GENERAL NOTES, SYMBOLS, AND ABBREVIATIONS
45. P0.1 – GENERAL NOTES, SYMBOLS, AND ABBREVIATIONS
46. P6.1 - PLUMBING FIXTURE SCHEDULE
47. P6.2 – PLUMBING EQUIPMENT SCHEDULES
48. M4.4 - SOLAR THERMAL – HVAC – ALTERNATE BID
49. M6.1 – MECHANICAL EQUIPMENT SCHEDULES – I
50. E0.1 – GENERAL NOTES, SYMBOLS AND ABBREVIATIONS
51. E1.0 – ELECTRICAL SITE PLAN
52. E4.1C – FIRST FLOOR SYSTEMS PLAN – UNIT C
53. E6.1 - LIGHT FIXTURE SCHEDULES
54. E6.3 – CATV RISER DIAGRAM AND TRANSFORMER SCHEDULE

55. E6.9 - PANELBOARD SCHEDULES
56. E7.1 – ONE-LINE DIAGRAM
57. E7.2 – CONDUIT AND CABLE SCHEDULES
58. E8.2 – ELECTRICAL DETAILS
59. E8.7 – ELECTRICAL DETAILS

END OF ADDENDUM NO. 03