## DOOR AND FRAME SCHEDULE - ALTERNATE DAYROOMS D & F

| OPNG. NO. | DOOR SIZE WIDTH | DOOR SIZE HEIGHT | DOOR SIZE DEPTH | DOOR ELEV. | DOOR MAT'L | DOOR GLAZING TYPE | FRAME ELEV. | FRAME MAT'L | FRAME DEPTH | FRAME GLAZING TYPE | DETAILS HEAD | DETAILS JAMB | DETAILS SILL | FIRE RATING | HDWR SET | COMMENTS | OPNG. NO. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C1461 | 3' - 0" | 7' - 0" | 2" | D1 | DHM | GCP-3 | 18/A13.1 | DHM | STL CELL | GCP-3 | --- | --- | --- | --- | S01A | 8. | C1461 |
| C1462 | 3' - 0" | 7' - 0" | 2" | D1 | DHM | GCP-3 | 18/A13.1 | DHM | STL CELL | GCP-3 | --- | --- | --- | --- | S01A | 8. | C1462 |
| C1463 | 3' - 0" | 7' - 0" | 2" | D1 | DHM | GCP-3 | 18/A13.1 | DHM | STL CELL | GCP-3 | --- | --- | --- | --- | S01A | 8. | C1463 |
| C1561 | 3' - 0" | 7' - 0" | 2" | D1 | DHM | GCP-3 | 6/A13.1 | DHM | STL CELL | --- | --- | --- | --- | --- | S01A | 8. | C1561 |
| C1562 | 3' - 0" | 7' - 0" | 2" | D1 | DHM | GCP-3 | 6/A13.1 | DHM | STL CELL | --- | --- | --- | --- | --- | S01A | 8. | C1562 |
| C1563 | 3' - 0" | 7' - 0" | 2" | D1 | DHM | GCP-3 | 12/A13.1 | DHM | STL CELL | GCP-3 | --- | --- | --- | --- | S01A | 8. | C1563 |
| C2461 | 3' - 0" | 7' - 0" | 2" | F1 | DHM | GCP-3 | 18/A13.1 | DHM | STL CELL | GCP-3 | --- | --- | --- | --- | S01A | 8. | C2461 |
| C2462 | 3' - 0" | 7' - 0" | 2" | F1 | DHM | GCP-3 | 18/A13.1 | DHM | STL CELL | GCP-3 | --- | --- | --- | --- | S01A | 8. | C2462 |
| C2463 | 3' - 0" | 7' - 0" | 2" | F1 | DHM | GCP-3 | 18/A13.1 | DHM | STL CELL | GCP-3 | --- | --- | --- | --- | S01A | 8. | C2463 |
| C2561 | 3' - 0" | 7' - 0" | 2" | F1 | DHM | GCP-3 | 6/A13.1 | DHM | STL CELL | --- | --- | --- | --- | --- | S01A | 8. | C2561 |
| C2562 | 3' - 0" | 7' - 0" | 2" | F1 | DHM | GCP-3 | 6/A13.1 | DHM | STL CELL | --- | --- | --- | --- | --- | S01A | 8. | C2562 |
| C2563 | 3' - 0" | 7' - 0" | 2" | F1 | DHM | GCP-3 | 12/A13.1 | DHM | STL CELL | GCP-3 | --- | --- | --- | --- | S01A | 8. | C2563 |

SEE BASE BID DOOR AND FRAME SCHEDULE FOR GENERAL NOTES, SCHEDULE ABBREVIATIONS, GLAZING SCHEDULES, AND SCHEDULE COMMENTS

## ROOM FINISH SCHEDULE (ALTERNATE DAYROOM D)

| ROOM NO. | ROOM NAME | FLOORS MAT. | FLOORS BASE | WALLS NORTH FINISH | WALLS EAST FINISH | WALLS SOUTH FINISH | WALLS WEST FINISH | REMARKS |
|---|---|---|---|---|---|---|---|---|
| C1461 | CELL TYPE C (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1462 | CELL TYPE C (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1463 | CELL TYPE D (4 MAN ADA) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1561 | CELL TYPE A (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1562 | CELL TYPE A (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1563 | CELL TYPE B (2 MAN ADA) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2461 | CELL TYPE C (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2462 | CELL TYPE C (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2463 | CELL TYPE M (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2561 | CELL TYPE L (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2562 | CELL TYPE L (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2563 | CELL TYPE A2 (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |

SEE BASE BID ROOM FINISH SCHEUDLE FOR FINISH ABBREVIATIONS, GENERAL NOTES, AND SCHEDULE COMMENTS

## ROOM FINISH SCHEDULE (ALTERNATE DAYROOM F)

| ROOM NO. | ROOM NAME | FLOORS MAT. | FLOORS BASE | WALLS NORTH FINISH | WALLS EAST FINISH | WALLS SOUTH FINISH | WALLS WEST FINISH | REMARKS |
|---|---|---|---|---|---|---|---|---|
| C1461 | CELL TYPE C (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1462 | CELL TYPE C (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1463 | CELL TYPE D (4 MAN ADA) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1561 | CELL TYPE A (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1562 | CELL TYPE A (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C1563 | CELL TYPE B (2 MAN ADA) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2461 | CELL TYPE C (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2462 | CELL TYPE C (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2463 | CELL TYPE M (4 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2561 | CELL TYPE L (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2562 | CELL TYPE L (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |
| C2563 | CELL TYPE A2 (2 MAN) | SC-1 | --- | --- | --- | --- | --- | C1, C7 |

SEE BASE BID ROOM FINISH SCHEUDLE FOR FINISH ABBREVIATIONS, GENERAL NOTES, AND SCHEDULE COMMENTS

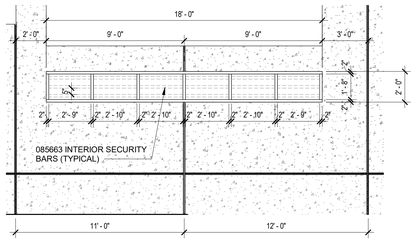


9 **DW-1**
SCALE: 1/4" = 1'-0"

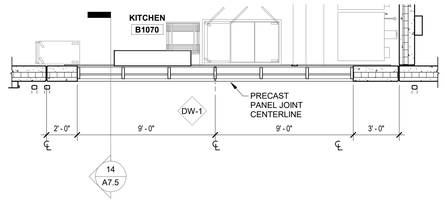


8 **ALTERNATE KITCHEN WINDOW - KITCHEN B1070**
SCALE: 1/4" = 1'-0"

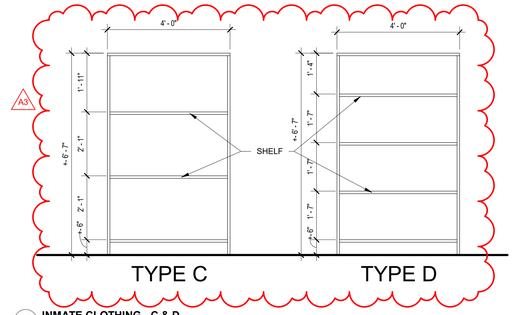


10 **INMATE CLOTHING - C & D**
SCALE: 1/2" = 1'-0"

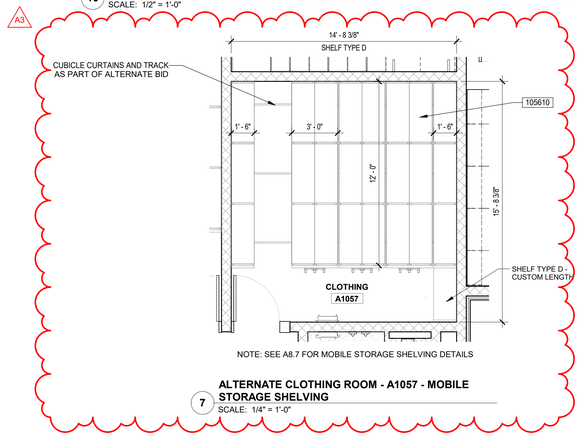


NOTE: SEE A8.7 FOR MOBILE STORAGE SHELVING DETAILS

7 **ALTERNATE CLOTHING ROOM - A1057 - MOBILE STORAGE SHELVING**
SCALE: 1/4" = 1'-0"

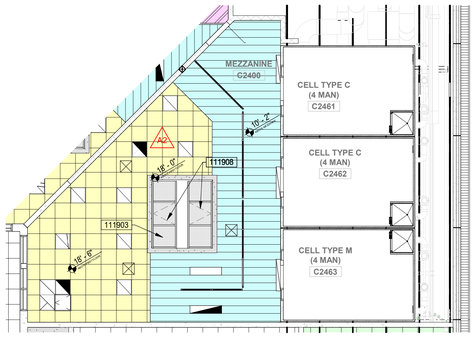


6 **MEZZANINE REFLECTED CEILING PLAN UNIT C - ALTERNATE DAYROOM D**
SCALE: 1/8" = 1'-0"

REFER TO CEILING PLANS FOR GENERAL NOTES AND LEGENDS

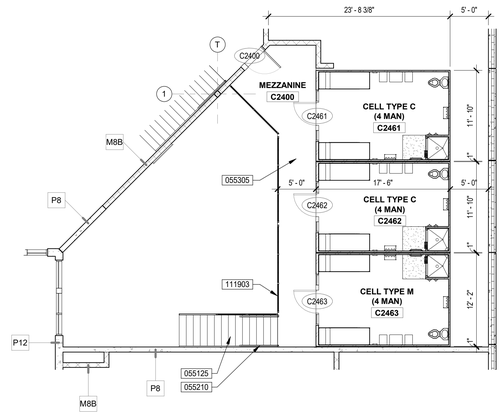


NOTE: CELL TYPE "M" IS IDENTICAL TO CELL TYPE "C2" BUT REVERSE THE DOOR HINGE SIDE

5 **ALTERNATE MEZZANINE FLOOR PLAN - UNIT C - ALTERNATE DAYROOM D**
SCALE: 1/8" = 1'-0"

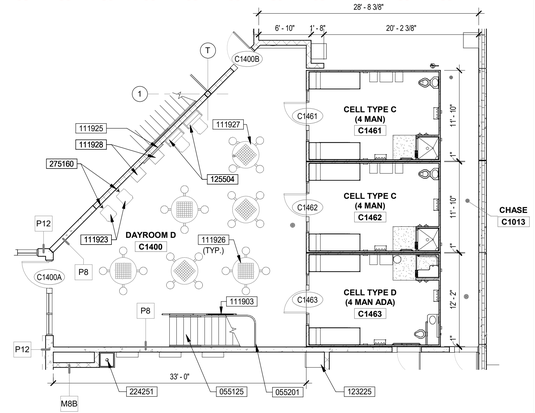


4 **ALTERNATE FIRST FLOOR PLAN - UNIT C - ALTERNATE DAYROOM D**
SCALE: 1/8" = 1'-0"

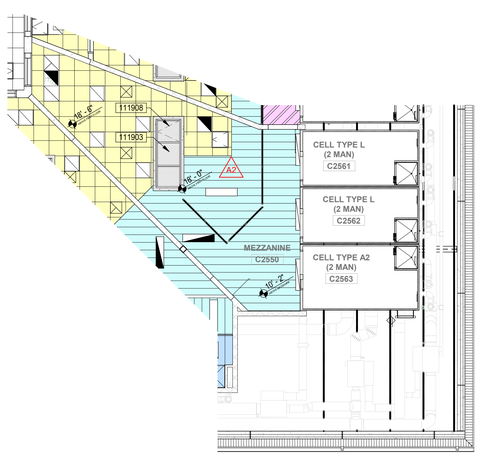


3 **MEZZANINE REFLECTED CEILING PLAN UNIT C - ALTERNATE DAYROOM F**
SCALE: 1/8" = 1'-0"

REFER TO CEILING PLANS FOR GENERAL NOTES AND LEGENDS

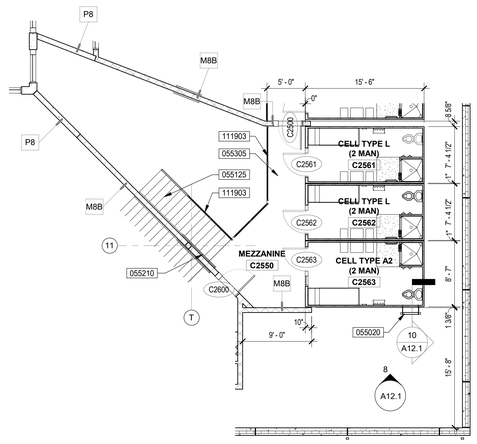


NOTE: CELL TYPE "L" IS IDENTICAL TO CELL TYPE "A" BUT REVERSE THE DOOR HINGE SIDE

2 **ALTERNATE MEZZANINE FLOOR PLAN - UNIT C - ALTERNATE DAYROOM F**
SCALE: 1/8" = 1'-0"

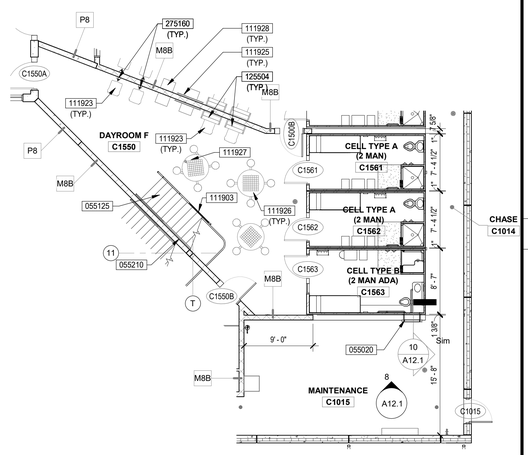


1 **ALTERNATE FIRST FLOOR PLAN - UNIT C - ALTERNATE DAYROOM F**
SCALE: 1/8" = 1'-0"

## GENERAL NOTES:

A. ALL KEYNOTES INDICATE ONE GRAPHIC REPRESENTATION TYPICAL. CONTRACTOR SHALL USE THE GRAPHICAL REPRESENTATIONS FOR COUNTS AND NOT THE KEYNOTES. THE ABSENCE OF A KEYNOTE DOES NOT ABSOLVE THE CONTRACTOR FROM PROVIDING THE FEATURE GRAPHICALLY SHOWN ON THE DRAWINGS.
B. REFER TO G1.1 FOR ADDITIONAL GENERAL NOTES AND INFORMATION.
C. REFER TO G1.2 FOR STANDARD AND ADA MOUNTING HEIGHTS AND ABBREVIATIONS.
D. COORDINATE WITH M.E.P. FOR ANY BULKHEADS, POWER, DATA, OR EQUIPMENT REQUIREMENTS.
E. DIMENSIONS TO EXTERIOR FACES OF BUILDING ARE TO THE OUTSIDE OF THE MASONRY VENEER AND PRECAST PANELS.
F. DIMENSIONS OF INTERIOR WALLS ARE TO FACE OF METAL STUD, CMU, OR PRECAST.
G. REFER TO PARTITON SCHEDULE ON SHEET G1.10.
H. FOR KITCHEN COMPONENTS REFER TO KITCHEN PLANS

## KEYNOTES

055020 VERTICAL METAL ACCESS LADDER

055125 CONT. GALV. ANGLE 3/4"X3/4"X3/16" W/5 HOLES EVENLY SPACED FOR PUDDLE WELD

055201 METAL GUARDRAIL SYSTEM, PAINTED

055210 1 1/2" DIA. STAINLESS STEEL PIPE RAIL

055305 1" GALVANIZED METAL GRATING, PART OF DETENTION MEZZANINE SYSTEM BY DETENTION EQUIPMENT CONTRACTOR

102130 CUBICLE CURTAINS AND TRACK

105610 MOBILE STORAGE SHELVING

111903 WOVEN ROD SECURITY BARRIER

111908 OPERABLE WOVEN ROD SECURITY BARRIER.

111923 SECURITY MULTIUSE RECREATION & CLASSROOM CHAIRS

111925 FLAT SCREEN TELEVISION MOUNTING BRACKET

111926 DETENTION 4-MAN DAYROOM TABLE

111927 DETENTION 4-MAN DAYROOM TABLE, ADA

111928 STAINLESS STEEL WALL-MOUNTED SHELF

123225 PLASTIC LAMINATE TALL CABINET

125504 DAYROOM VIDEO VISITATION CABINET

224251 MOP SINK, REFERENCE PLUMBING

275160 DAYROOM DETENTION PHONE, OWNER FURNISHED / OWNER INSTALLED

## REFLECTED CEILING PLAN LEGEND

- 24"x24" SUSPENDED ACOUSTICAL PANEL CEILING SYSTEM **(ACP-1)**
- 24"x24" SECURITY PANEL CEILING SYSTEM, SOLID FACE **(SMC-1)**
- 24"x24" SECURITY PANEL CEILING SYSTEM, PERFORATED **(SMC-2)**
- 24"x24" TECTUM PANEL CEILING SYSTEM **(ACP-2)**
- 12" SECURITY PLANK CEILING SYSTEM, SOLID **(SMC-3)**
- 12" SECURITY PLANK CEILING SYSTEM, PERFORATED **(SMC-4)**
- METAL PANEL CEILING SYSTEM BY D.E.C. ATTACHED TO UNDESIDE OF TRUSS
- METAL PANEL CEILING SYSTEM OVERBUILD BY D.E.C.
- PRECAST CAP
- SUSPENDED GYPSUM BOARD CEILING (PAINTED)
- SUSPENDED GYPSUM BOARD CEILING (PAINTED) WITH SECURITY MESH
- DECORATIVE STAINLESS STEEL BULKHEAD
- METAL SOFFIT PANEL (PRE-FINISHED)
- EXP. EXPOSED
- RETURN AIR GRILLE, SEE MECHANICAL
- SUPPLY AIR DIFFUSER, SEE MECHANICAL
- EXHAUST GRILLE, SEE MECHANICAL
- LIGHT FIXTURE, SEE ELECTRICAL
- LIGHT FIXTURE, SEE ELECTRICAL
- ACCESS PANEL
- SKYLIGHT

NOTE:
ELEMENTS ON THIS DRAWING ARE IDENTIFIED BY VARIOUS COLORS; IF THIS NOTE IS NOT RED, THIS DRAWING IS NOT IN COLOR AND NEEDS TO BE REPRINTED IN COLOR.

## KEYPLAN





DLZ
ARCHITECTURE • ENGINEERING • PLANNING
SURVEYING • CONSTRUCTION SERVICES
DLZ INDIANA, LLC


2022-02-16
STATE OF INDIANA

| NO. | REVISION | DATE |
|---|---|---|
| A2 | ADDENDUM 2 | 02/02/22 |
| A3 | ADDENDUM 3 | 02/16/22 |

DRAWN: KPK CHK'D: KPK
DESIGNED: EBR
APPRV'D: EBR
DATE: DECEMBER 20, 2021

PROJECT NUMBER 2063-1048-90

# SULLIVAN COUNTY SHERIFF'S OFFICE AND CORRECTIONAL FACILITY

2357 NORTH SECTION STREET SULLIVAN, INDIANA 47882

ADD ALTERNATE FLOOR PLANS AND DETAILS

DRAWING NUMBER

A2.9

ARCHITECTURE

C:\RevitBackups\2020\2063-1048-90 Sullivan County Jail - Arch_zmcgjl4TEWM.rvt
2/15/2022 5:45:17 PM